



ACCENTO TR

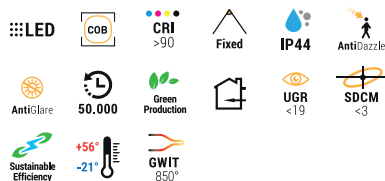

RECESSED / A INCASSO

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
TR Triac
PH Phase dimming

CCT OPTIONS


3000K Warm white
4000K Neutral white

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
40046008	8W	965 lm	15°/24°/36°/45°/55°	Ø85	Ø85 x 112 h
40046012	12W	1432 lm	15°/24°/36°/45°/55°	Ø85	Ø85 x 112 h
40046015	15W	1648 lm	15°/24°/36°/45°/55°	Ø85	Ø85 x 112 h


OPTIONAL

FINISHING: White

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Accento Tr fa parte della famiglia Accento, caratterizzato da un design trimless a incasso che offre un'illuminazione focalizzata. Accento Tr riduce al minimo l'abbagliamento, mettendo in risalto la bellezza di oggetti o spazi. Il suo design elegante e sofisticato si adatta perfettamente agli interni moderni, mentre le sue prestazioni di alta qualità garantiscono un'illuminazione ottimale.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

Diffusore: Lente PMMA

LED: Riduce il consumo energetico con L80/B10/F10, con una durata di 50.000 ore, e funziona in modo efficace tra -20°C e 50°C.

Accento Tr is part of the Accento family, featuring a trimless, recessed design that provides focused accent lighting. Accento Tr ensures minimal glare while emphasizing the beauty of objects or spaces. Its sleek, sophisticated design complements modern interiors, while its high-performance functionality guarantees optimal lighting.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

Diffuser: PMMA lens

LED: Reduces energy consumption with L80/B10/F10, offering a 50,000-hour lifespan, and operates effectively between -20°C and 50°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

