



ACCENTO

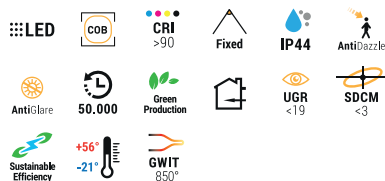

RECESSED / A INCASSO

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
TR Triac
PH Phase dimming


CCT OPTIONS

3000K Warm white
4000K Neutral white


OPTIONAL

FINISHING: White

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
40042006	6W	494 lm	15°/24°/36°/55°	Ø55	Ø63 x 79 h
40042008	8W	615 lm	15°/24°/36°/55°	Ø55	Ø63 x 79 h
40043007	8W	598 lm	15°/24°/36°/45°/55°	Ø55	Ø63 x 79 h
40043012	12W	888 lm	15°/24°/36°/45°/55°	Ø80	Ø90 x 112 h
40043015	15W	1022 lm	15°/24°/36°/45°/55°	Ø80	Ø90 x 112 h

Accento è il primo membro della famiglia Accento, progettato per accentuare oggetti singoli grazie alla sua piccola apertura di emissione luminosa. Disponibile con opzioni per copertura pinhole, ovale o washer, è dotato di un cono antiabbagliamento con un anello bianco e interno nero, che migliora il comfort visivo. Perfetto per applicazioni che richiedono un'illuminazione focalizzata, Accento riduce al minimo l'abbagliamento, mettendo in risalto la bellezza di oggetti o spazi.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

Diffusore: Lente PMMA

LED: Riduce il consumo energetico con L80/B10/F10, con una durata di 50.000 ore, e funziona in modo efficace tra -20°C e 50°C.

Accento is the first member of the Accento family, designed to confidently accentuate individual objects with its small light emission aperture. Available with options for a pinhole, oval, or washer cover, it is equipped with an anti-glare cone featuring a white ring and black interior, providing enhanced visual comfort. Perfect for applications that require focused accent lighting, Accento ensures minimal glare while emphasizing the beauty of objects or spaces.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

Diffuser: PMMA lens

LED: Reduces energy consumption with L80/B10/F10, offering a 50,000-hour lifespan, and operates effectively between -20°C and 50°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.



Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.