



ADUA WS1 QUADRO

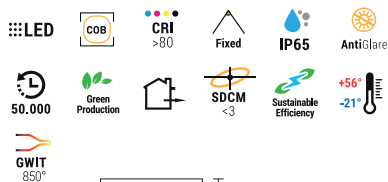


DRIVER OPTIONS	CCT OPTIONS
OF On/Off	2700K Warm white
DL DALI	3000K Warm white
IV 1/10V dimming	4000K Neutral white
TR Triac	5000K Cool white

COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
41211022	11W (2x)	1048 lm (2x)	15°/24°/36°/50°	120 x 120 x 275 h
41213060	30W (2x)	2493 lm (2x)	15°/24°/36°/50°	160 x 160 x 330 h
41215088	44W (2x)	3659 lm (2x)	15°/24°/36°/50°	200 x 200 x 450 h


OPTIONAL

FINISHING: Black

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Italy Adua WS1 Quadro offre un design elegante e moderno, ideale per spazi esterni. La sua costruzione resistente e impermeabile garantisce prestazioni affidabili in tutte le condizioni atmosferiche, con una funzione rimovibile per una facile manutenzione e sostituzione dei componenti. Disponibile in versione marina su richiesta, è progettata per resistere anche agli ambienti più difficili.

Alloggiamento: Alluminio pressofuso verniciato a polvere

Riflettore: Alluminio anodizzato

Diffusore: Vetro temperato trasparente

LED: Tecnologia LED avanzata per un'efficienza energetica ottimizzata (L80/B10/F10), con una durata di 50.000 ore e funzionante tra -21°C e 56°C.

UK The Adua WS1 Quadro wall surface light offers a sleek and modern design, ideal for outdoor spaces. Its durable, waterproof construction ensures reliable performance in all weather conditions, with a detachable feature for easy maintenance and replacement of components. Available in marine grade upon request, it's built to withstand even the harshest environments.

Housing: Die-cast aluminum powder-coated

Reflector: Anodized aluminum

Diffuser: Tempered clear glass

LED: Advanced LED technology for energy efficiency (L80/B10/F10), offering a lifespan of 50,000 hours and functioning between -21°C and 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

