

Installation instructions


FARO SIDE



Outdoors



IP Rating



PC Replacement



100-240V.AC





LED Lifetime



Product introduction


- Column housing for illumination of walkways, entrances and access roads.
- High intensity tempered glass.
- High performance PC light guide lens.

Dimension drawing

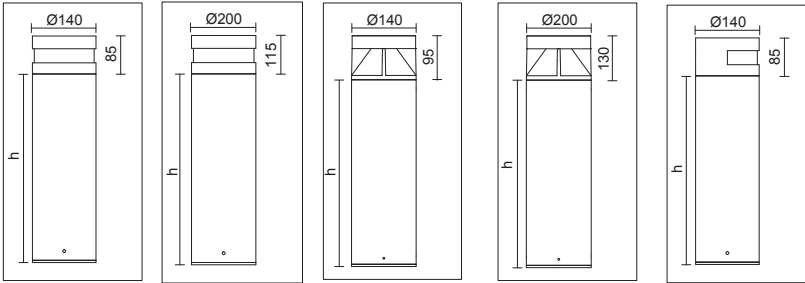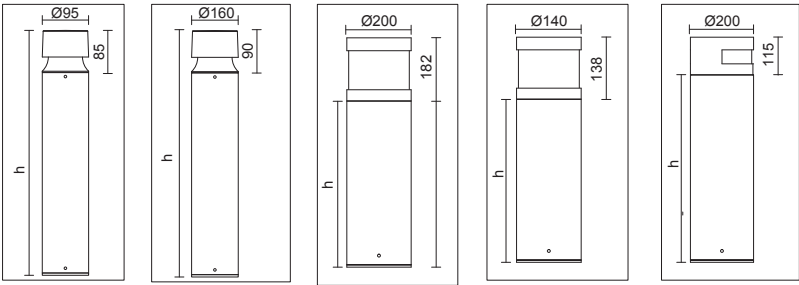


Matters needing attention

- Read the instructions carefully before installation and commissioning.
- The installation and removal of lamps require professional technical personnel to operate.
- When you open the package, please check if there are signs of serious damage to the bollard luminaire.
- When connected, please cut off all lighting fixtures to connect the power supply, so as not to get an electric shock.
- Installation must be carried out in dry ambient.
- Can not remove the original structure, to avoid leakage of light.
- Waterproof grade IP65 lamps, lamps shall not be installed in the low-lying or long-term water, electrical boxes need to be higher than the surface.
- Lighting outlet and on-site power supply cable connection needs to do IP68 protection level, so as not to affect the normal operation of the lamp.
- Lamps are not recommended to be installed on the beach and corrosive chemical areas, so as not to cause corrosion of lamps and lanterns led to light damage.

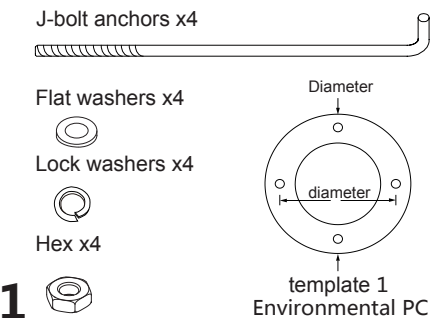


1

- Insert J-bolt anchors**
- Insert steel J-bolt anchors into concrete.
 - Use template to position J-bolt anchors in proper locations.
 - Tops of J-bolt anchors must be a minimum of 1" above concrete surface.

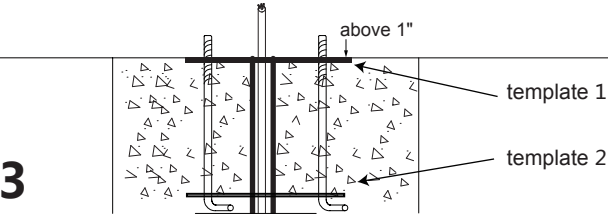


3

- Pour concrete footer**
- A sufficient footer size depends on base plate diameter and J-bolt anchors deep to be determined by the installer.

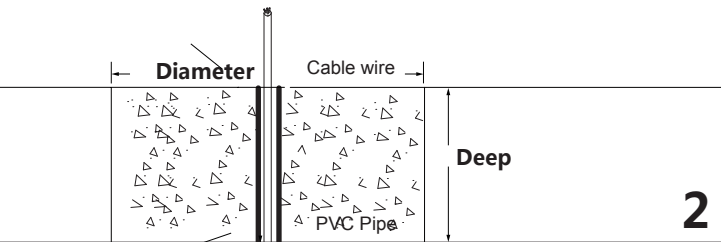


2

- Attach base plate to J-bolts**
- Undo the 3 Allen screws at the sides. Remove base plate from the luminaire.
 - Screw the base plate onto the J-bolt anchors using screws and washers.

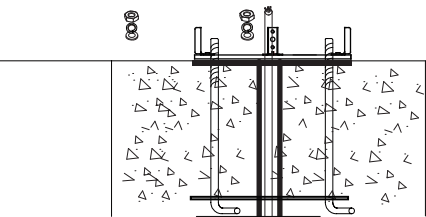


4

- Mount the luminaire**
- Mount the luminaire with allen screws.

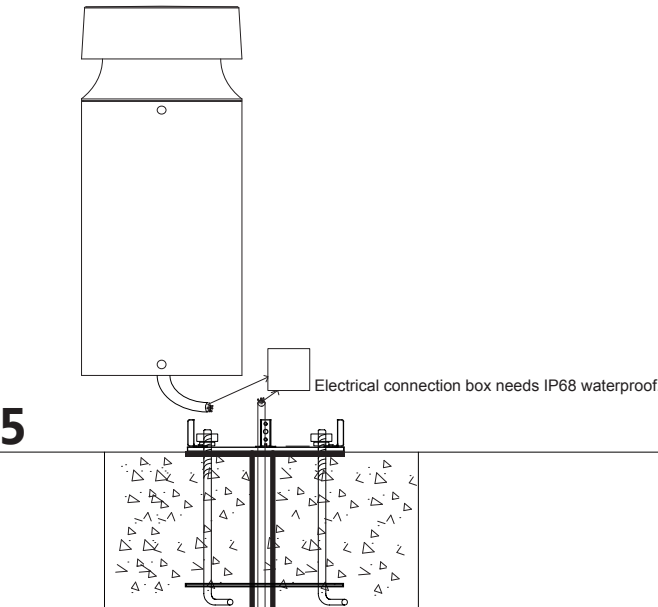

5

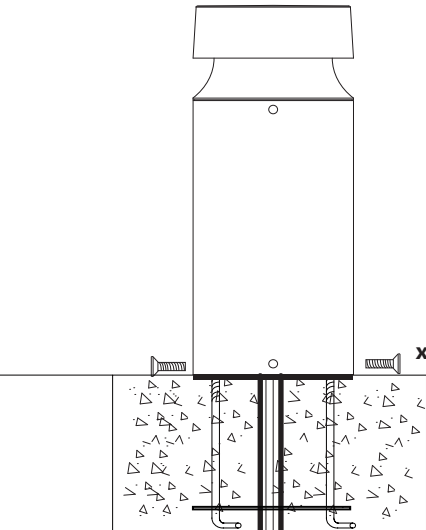

6