
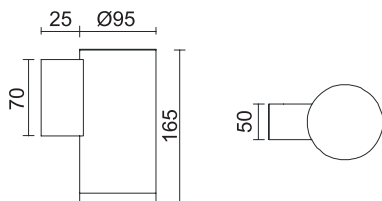


ADUA WS2

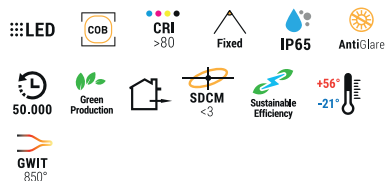

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
TR Triac

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white

COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
41203011	11W	1048 lm	15°/24°/36°/50°	120 x 95 x 165 h
41205022	22W	1732 lm	15°/24°/36°/50°	200 x 160 x 220 h
41206030	30W	2493 lm	15°/24°/36°/50°	200 x 160 x 220 h
41208044	44W	3659 lm	15°/24°/36°/50°	240 x 200 x 300 h


OPTIONAL

FINISHING: Black

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Italy Adua WS2 è una luce da parete versatile e affidabile progettata per ambienti esterni. La sua impermeabilità strutturale garantisce resistenza alle intemperie, mentre il design modulare consente una facile sostituzione dei componenti come LED, lente e driver. È disponibile su richiesta in versione marina, rendendola ideale per le aree costiere.

Alloggiamento: Alluminio pressofuso verniciato a polvere

Riflettore: Alluminio anodizzato

Diffusore: Vetro temperato trasparente

LED: Sistema LED ad alta efficienza con ridotto consumo energetico (L80/B10/F10), durata di 50.000 ore e funzionante a temperature comprese tra -21°C e 56°C.

UK The Adua WS2 is a versatile and reliable wall-mounted light designed for outdoor environments. Its structural waterproofing guarantees it will stand up to harsh weather, while its modular design allows easy replacement of components like the LED, lens, and driver. Customization to marine grade is available, making it perfect for coastal areas.

Housing: Die-cast aluminum powder-coated

Reflector: anodized aluminum

Diffuser: tempered clear glass

LED: High-efficiency LED system with reduced energy consumption (L80/B10/F10), lasting up to 50,000 hours and operational in temperatures from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

