

Installation instructions

MATINI



Outdoors



IP Rating



PC Replacement



100-240V.AC





LED Lifetime



Product introduction

- Column housing for illumination of walk ways, entrances and access roads.
- High intensity tempered glass.
- High performance PC light guide lens.

Dimension drawing

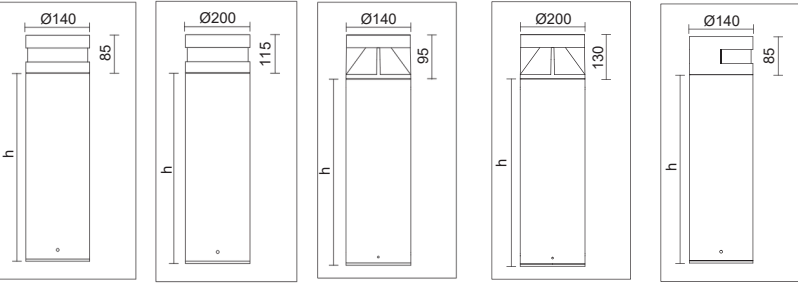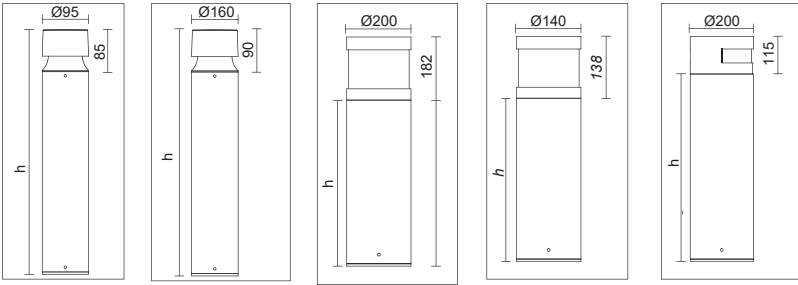

Matters needing attention

- Read the instructions carefully before installation and commissioning.
- The installation and removal of lamps require professional technical personnel to operate.
- When you open the package, please check if there are signs of serious damage to the bollard luminaire.
- When connected, please cut off all lighting fixtures to connect the power supply, so as not to get an electric shock.
- Installation must be carried out in dry ambient.
- Can not remove the original structure, to avoid leakage of light.
- Water proof grade IP65 lamps, lamps shall not be installed in the low-lying or long-term water, electrical boxes need to be higher than the surface.
- Lighting outlet and on-site power supply cable connection needs to do IP68 protection level, so as not to affect the normal operation of the lamp.
- Lamps are not recommended to be installed on the beach and corrosive chemical areas, so as not to cause corrosion of lamps and lanterns led to light damage.

J-bolt anchors x4

Flat washers x4

Lock washers x4

Hex x4

template 1
Environmental PC

template 2
Galvanized sheet

1

Insert J-bolt anchors

- Insert steel J-bolt anchors into concrete.
- Use template to position J-bolt anchors in proper locations.
- Tops of J-bolt anchors must be a minimum of 1" above concrete surface.

Pour concrete footer

- Asufficient footer size depends on base plate diameter and J-bolt anchors deep to be determined by the installer.

Diameter

Cable wire

Deep

PVC Pipe

2

above 1"

template 1

template 2

3

Attach base plate to J-bolts

- Undo the 3 Allen screws at the sides. Remove base plate from the luminaire.
- Screw the base plate onto the J-bolt anchors using screws and washers.

4

Electrical connection box needs IP68 waterproof.

5

Mount the luminaire

- Mountheluminairewith allen screws.

x4

6