



ALERA

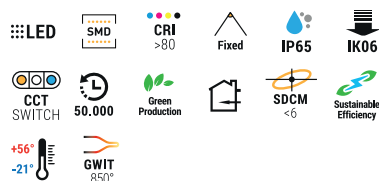

DRIVER OPTIONS

OF On/Off
TR Triac
DL Dali
IV 1/10V dimming

CCT OPTIONS

CCT CCT Changeable
 3000K/ 4000K/
 5700K

COD.	POWER	LUMEN	B.ANGLE	LIGHT EMISSION	SIZE (mm)
41280008	8W	850 lm	50°	Single	70 x 95 x 143 h
41280015	2x7.5W	1700 lm	50°	Double	70 x 95 x 179 h


OPTIONAL

FINISHING: White RAL9016
 Black RAL9005

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Applique a singola o doppia emissione. Adatto per le pareti esterne, ovunque si voglia aggiungere un tocco di classe. Il sistema LED ad alta efficienza consente di offrire prestazioni eccellenti risparmiando energia. La qualità dei materiali, accuratamente selezionati per garantire una lunga durata di funzionamento, è una garanzia in termini di resistenza agli agenti atmosferici.

Alloggiamento: alluminio pressofuso

Diffusore: lente diffusore in policarbonato

LED: risparmio energetico L80/B10/F10 - durata 50.000h - temperatura di lavoro da -21°C a 56°

Single or double emission wall light. Suitable for the outdoor walls, anywhere you want to add a classy touch. The high efficiency LED system permits to deliver excellent performance while saving energy. The quality of the materials, carefully selected to ensure the long working life span, is a warranty in term of weather resistance.

Housing: die-cast aluminium powder coated

Diffuser: polycarbonate diffuser

LED: reduce energy consumption with L80/B10/F10 - 50.000 hrs lifetime working under temp (-21°C to 56°C)

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.



Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.