

Installation instructions


FACADE



Outdoors



IP Rating



Glass Replacement



Installation



100-240V




LED Lifetime



Product introduction

- The LED board adopts aluminum material structure as the heat sink, so as to achieve good heat dissipation effect.
- AkzoNobel UV resistant polyester powder coating.
- High intensity tempered glass.
- All screws exposed in SS grade.

Dimension drawing

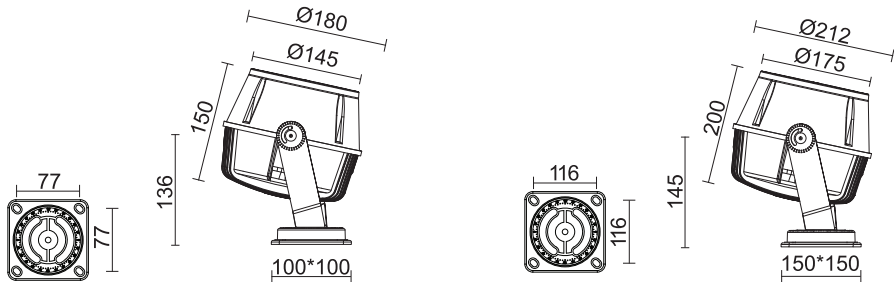

Attention

- Before the lamp is connected, please carefully check the input voltage, so as not to cause damage to the lamp.
- The installation and removal of lamps require professional technical personnel to operate.
- When you open the package, please check if there are signs of serious damage to the lamps.
- When connected, please cut off all lighting fixtures to connect the power supply, so as not to get an electric shock.
- This product can only be installed in dry or sunny weather.
- Can not remove the original structure, to avoid leakage of light.
- Glass with waterproof and dust, such as the discovery of broken glass, please replace the glass in a timely manner.
- Waterproof grade IP65 lamps, lamps shall not be installed in the low-lying or long-term water, electrical boxes need to be higher than the surface.
- Lighting outlet and on-site power supply cable connection needs to do IP68 protection level, so as not to affect the normal operation of the lamp.
- Please choose according to product appearance specifications corresponding to the power supply, power cable, not led lamp and metal halide lamp, sodium lamp and motor share a power supply circuit.
- Lamps are not recommended to be installed on the beach and corrosive chemical areas, so as not to cause corrosion of lamps and lanterns led to light damage.

Installation requirements

- The screw on mouting bracket must be loosened before adjusting. Damage for screw or bracket maybe caused barbarically.
- Open the package, take the installation manual out.
- Remove the two screws on bracket with the proper tooling <Image 1>.
- After removal, fix the mounting bracket on a wall or other places tightly with screws<four screws> in case of falling and damage to public. <image 2>
- Fix the mounting base on a wall or other places needed with screws tightly in case of falling and damage to public.
- Fix the bracket tightly, adjust the head, screw it tightly again. <Image 3>

