


ALERINO

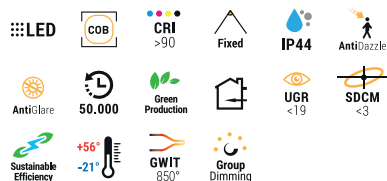

DRIVER OPTIONS

OF On/Off

CCT OPTIONS

2700K Warm white
 3000K Warm white
 4000K Neutral white
 5000K Cool white
 6000K Cool white
 6500K Cool white

OPTIONAL


FINISHING: White, Black

ACCESSORIES: White inner lampshield



COD.	POWER	LUMEN	B.ANGLE	DIM./SIZE (mm)
41557035	35W	2950 lm	24°/36°/60°	Ø80 x 60 h

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	9251	Ø0.42
2	2313	Ø0.85
3	1028	Ø1.27
4	578.2	Ø1.70
5	370.0	Ø2.12

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Italy: Alerino è uno spot tubolare ultra-sottile, progettato con uno schermo antiriflesso aggiuntivo e una potenza di 35 watt, rendendolo una soluzione di illuminazione efficiente ed elegante. Ideale per un'illuminazione mirata, il suo design compatto e le caratteristiche ad alte prestazioni garantiscono precisione e comfort.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Caratterizzato da un basso consumo energetico con una valutazione L80/B10/F10, offrendo una durata di 50.000 ore e funziona efficacemente in temperature da -21°C a 56°C.

UK: Alerino is an ultra-slim tubular spot, designed with an add-on low glare shield and a 35-watt rated power, making it an efficient and stylish lighting solution. Ideal for focused lighting, its compact design and high-performance features ensure precision and comfort.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Features low energy consumption with an L80/B10/F10 rating, offering a 50,000-hour lifespan, and operates effectively in temperatures ranging from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

