

Installation instructions


STILO



Outdoors



IP Rating



PC Replacement



100-240V.AC




LED Lifetime




Product introduction

- Column housing for illumination of walkways, entrances and access roads.
- LED module.
- UV resistant polyester powder coating.

Dimension drawing

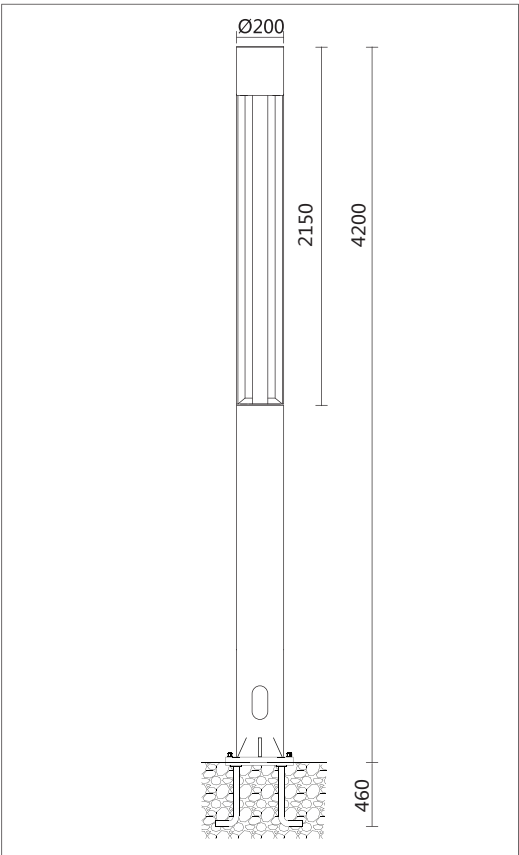

5058



Matters needing attention

- Before the lamp is connected, please carefully check the input voltage, so as not to cause damage to the lamp.
- The installation and removal of lamps require professional technical personnel to operate.
- When you open the package, please check if there are signs of serious damage to the lamps.
- When connected, please cut off all lighting fixtures to connect the power supply, so as not to get an electric shock.
- This product can only be installed in dry or sunny weather.
- Can not remove the original structure, to avoid leakage of light.
- Glass with waterproof and dust, such as the discovery of broken glass, please replace the glass in a timely manner.
- Waterproof grade IP65 lamps, lamps shall not be installed in the low-lying or long-term water, electrical boxes need to be higher than the surface.
- Lighting outlet and on-site power supply cable connection needs to do IP68 protection level, so as not to affect the normal operation of the lamp.
- Please choose according to product appearance specifications corresponding to the power supply, power cable, not led lamp and metal halide lamp, sodium lamp and motor share a power supply circuit.
- Lamps are not recommended to be installed on the beach and corrosive chemical areas, so as not to cause corrosion of lamps and lanterns led to light damage.

Installation requirements

- Open the package, take out lamps and accessories bags.
- Pre-recessed to installation area. <see image 1>
- The installation area must be concreted. <see image 1>
- Loosen four screws on maintenance opening, open it for maintenance.
- 1.2M main cable need pre-prepared in advance, pull it through the bottom of pole to maintenance opening, wiring connection must be IP68 waterproofed.<see image 2>
- After the cable connection is completed, the maintenance cover is fastened to the lamp body.

