



ALFA ADJ

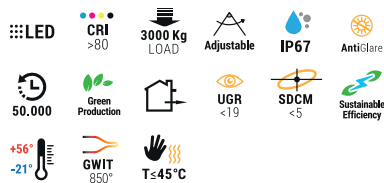

VOLTAGE

AC220-240V

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
TR Triac

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white




OPTIONAL

FINISHING: Silver

BEAM ANGLE

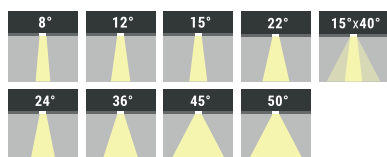

LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
41119022	22W	1224 lm	15°/24°/36°/50°	Ø 210	Ø 220 x 200 h
41120060	60W	5757 lm	8°/12°/22°/45°/15°x40°	Ø 309	Ø 320 x 270 h

Alfa Adj è un faretto interrato versatile ed elegante, progettato per offrire efficienza e stile agli spazi esterni. Il suo fascio LED puro fornisce un'illuminazione potente ed economica, mentre la manutenzione facile garantisce un utilizzo senza problemi. Realizzato con un corpo in alluminio pressofuso resistente alla corrosione, questo faretto assicura durabilità nel tempo, con la possibilità di essere installato in terreno o ghiaia per integrarsi perfettamente nel paesaggio.

Alloggiamento: Alluminio pressofuso con copertura in acciaio inossidabile

Diffusore: Vetro temperato trasparente

Accessori: Include una scatola in PVC per un'installazione sicura al suolo, con finiture RAL opzionali per un aspetto personalizzato.

LED: Tecnologia LED ad alta efficienza (L80/B10/F10), con una durata di 50.000 ore e prestazioni affidabili a temperature da -21°C a 56°C.

Alfa Adj is a versatile and stylish in-ground luminaire, designed to bring efficiency and elegance to your outdoor spaces. Its clean LED beam provides bright, energy-saving illumination, and its easy maintenance ensures hassle-free use. Built with a corrosion-resistant die-cast aluminum body, this fixture promises durability for years to come, with the flexibility to be installed in soil or gravel for a seamless integration into your landscape.

Housing: Die-cast aluminum with a stainless steel cover

Diffuser: Transparent tempered glass

Accessories: Includes a PVC box for secure ground installation, with optional RAL finishes for a tailored appearance.

LED: High-efficiency LED technology (L80/B10/F10), delivering a 50,000-hour lifespan and reliable performance in temperatures ranging from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

