

Installation instructions


STILO L



Outdoors



IP Rating



PC Replacement



100-240V.AC




LED Lifetime

Product introduction

- Column housing for illumination of walkways, entrances and access roads.
- LED module.
- UV resistant polyester powder coating.



Dimension drawing

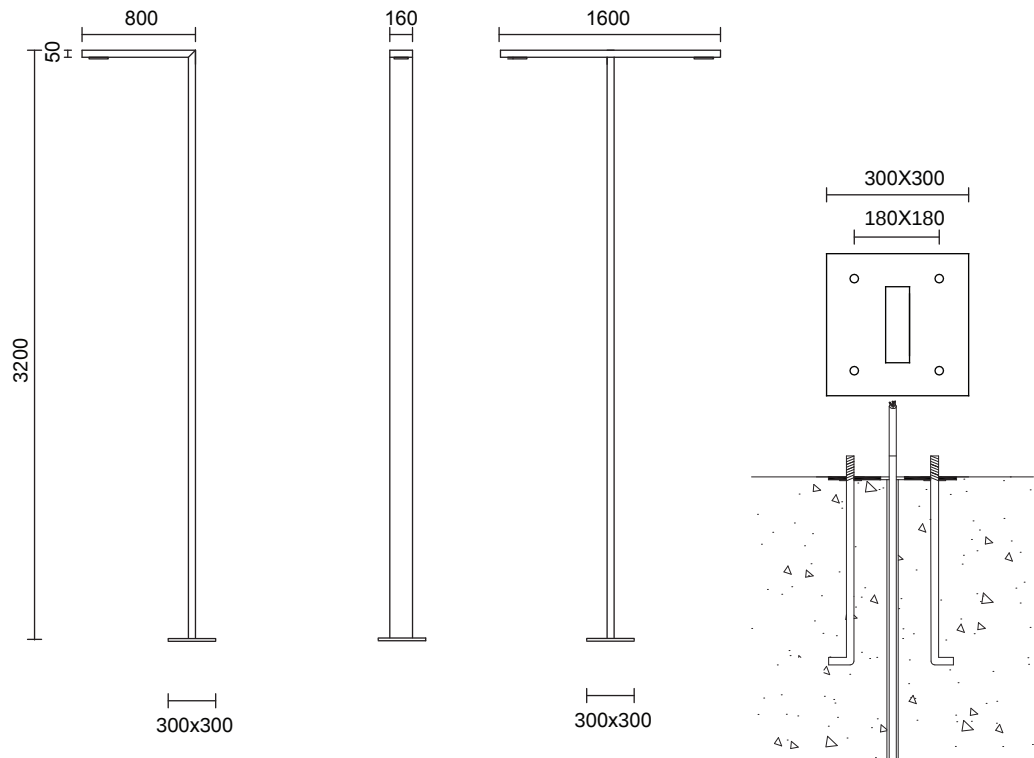

Matters needing attention

- Before the lamp is connected, please carefully check the input voltage, so as not to cause damage to the lamp.
- The installation and removal of lamps require professional technical personnel to operate.
- When you open the package, please check if there are signs of serious damage to the lamps.
- When connected, please cut off all lighting fixtures to connect the power supply, so as not to get an electric shock.
- This product can only be installed in dry or sunny weather.
- Can not remove the original structure, to avoid leakage of light.
- Glass with waterproof and dust, such as the discovery of broken glass, please replace the glass in a timely manner.
- Waterproof grade IP65 lamps, lamps shall not be installed in the low-lying or long-term water, electrical boxes need to be higher than the surface.
- Lighting outlet and on-site power supply cable connection needs to do IP68 protection level, so as not to affect the normal operation of the lamp.
- Please choose according to product appearance specifications corresponding to the power supply, power cable, not led lamp and metal halide lamp, sodium lamp and motor share a power supply circuit.
- Lamps are not recommended to be installed on the beach and corrosive chemical areas, so as not to cause corrosion of lamps and lanterns led to light damage.

Installation requirements

- Open the package, take the fixture and mounting anchor out.
- Install the mounting anchor first, pull the prepared wiring out from the middle hole of anchor.
- Remove the bottom cover ring and fix it to anchor tightly, waggle is not allowed.
- Open the maintenance door on bottom of pole, connect the wiring of fixture with main power.
- The joint of wiring connection between products and main power supply should be waterproofed completely.
- Fix the housing to bottom cover ring again.

