



ARA

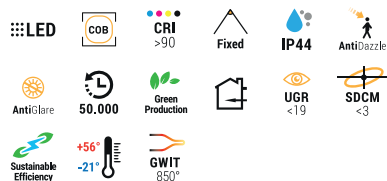

RECESSED / A INCASSO

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
40101010	10W	825 lm	15°/24°/36°	Ø 75	Ø85 x 74 h
40101015	15W	1238 lm	15°/24°/36°	Ø 75	Ø85 x 89 h


OPTIONAL

FINISHING: White trim
REFLECTOR: Shining silver
Shining gold
Matte gold
Matte black
Matte white

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Italy: Ara è un faretto a incasso progettato per soddisfare le esigenze di qualsiasi progetto architettonico o di design. Dotato di una sorgente luminosa COB LED, riduce al minimo l'effetto di abbagliamento, mentre l'indice di resa cromatica elevato offre una luce naturale, uniforme e gradevole. Il riflettore è disponibile in diverse colorazioni anodizzate per soddisfare ogni gusto estetico.

Alloggiamento: Alluminio pressofuso con scelta di colori

Riflettore: Disponibile in diverse opzioni di colori anodizzati

Diffusore: Vetro temperato trasparente

LED: Riduce il consumo energetico con L80/B10/F10, garantendo una durata di 50.000 ore e prestazioni affidabili in un intervallo di temperature da -20°C a 50°C.

UK: Ara is a recessed spotlight designed to meet the demands of any architectural or design project. Featuring a COB LED light source, it ensures minimal glare, while the high color chromatic index delivers natural, uniform, and pleasant illumination. The reflector comes in a variety of colors, allowing for customization to suit any aesthetic preference.

Housing: Die-cast aluminum with a choice of colors

Reflector: Available in multiple anodized color options

Diffuser: Clear tempered glass

LED: Reduces energy consumption with L80/B10/F10, providing a 50,000-hour lifespan and reliable performance in temperatures ranging from -20°C to 50°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

