
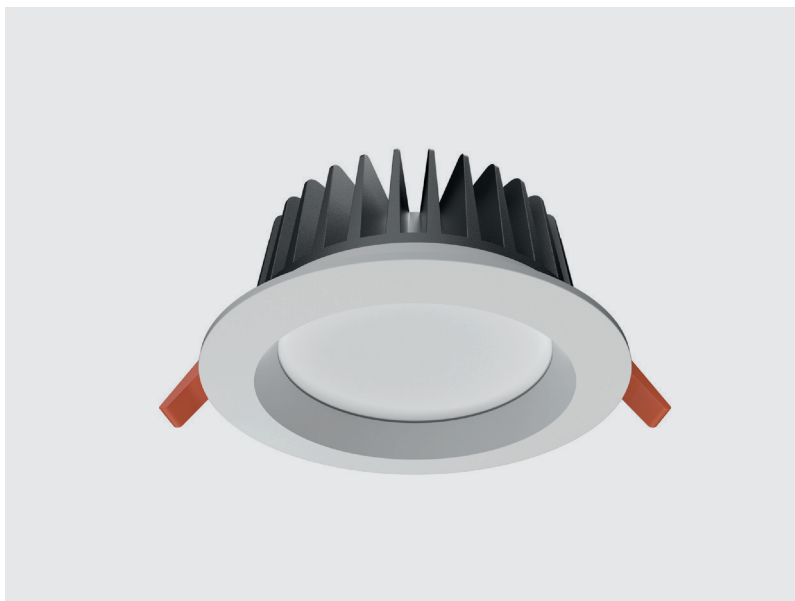



AREA OPAL

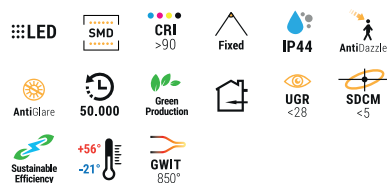


DRIVER OPTIONS	CCT OPTIONS
OF On/Off	3000K Warm white
DL DALI	4000K Neutral white
IV 1/10V dimming	
TR Triac	
PH Phase dimming	
OPTIONAL	
FINISHING: White	

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
40062008	8W	864 lm	90°	Ø 90	Ø 110 x 53 h
40062012	12W	1296 lm	90°	Ø 90	Ø 110 x 53 h
40063015	15W	1848 lm	90°	Ø 125	Ø 145 x 69 h
40063020	20W	2272 lm	90°	Ø 125	Ø 145 x 69 h
40064025	25W	2700 lm	90°	Ø 165	Ø 190 x 86 h
40064030	30W	3445 lm	90°	Ø 165	Ø 190 x 86 h
40065030	30W	3665 lm	90°	Ø 200	Ø 230 x 99 h
40065040	40W	4773 lm	90°	Ø 200	Ø 230 x 99 h

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Area Opal con il suo diffusore opalino e il design elegante disponibile in molteplici dimensioni, è un downlight che unisce eleganza e minimalismo, mantenendo un profilo sottile. La cura nei dettagli lo rende unico, offrendo un'estetica raffinata che lo distingue dalle altre soluzioni. Progettato con un'attenzione particolare all'efficienza energetica, garantisce ottimi risparmi energetici e bassi consumi, mantenendo al contempo alte prestazioni. Perfetto per ogni ambiente in cui stile e funzionalità sono essenziali.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

Diffusore: Vetro temperato

LED: Riduce il consumo energetico con L80/B10/F10, garantendo una durata di 50.000 ore e un'efficienza operativa a temperature comprese tra -21°C e 56°C.

Area Opal, with its opal diffuser and sleek design available in multiple sizes, this downlight combines elegance and minimalism while maintaining a thin profile. Its attention to detail makes it stand out, offering a refined aesthetic that distinguishes it from other options. Designed with energy efficiency in mind, it provides excellent energy savings and low consumption, all while maintaining high performance. Perfect for any space where style and functionality are essential.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

Diffuser: Tempered glass

LED: Reduces energy consumption with L80/B10/F10, offering a 50,000-hour lifespan and effective operation between -21°C and 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

