



ARENA

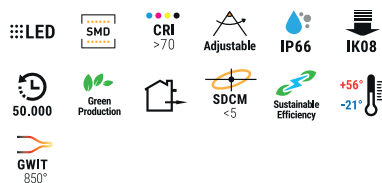

VOLTAGE

AC100-240V 50/60HZ

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
DX DMX

CCT OPTIONS

4000K Neutral white
5000K Cool white
5700K Cool white


OPTIONAL

FINISHING: Black




COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
40945200	200W	25000 lm	10°/20°	356 x 303 x 327 h
40945400	400W	50000 lm	10°/20°	356 x 336 x 511 h
40945600	600W	75000 lm	10°/20°	356 x 414 x 576 h
40945800	800W	92000 lm	10°/20°	653 x 312 x 518 h
409451200	1200W	138000 lm	10°/20°	653 x 397 x 625 h
409451600	1600W	184000 lm	10°/20°	722 x 480 x 825 h
409452000	2000W	230000 lm	10°/20°	722 x 572 x 963 h

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Italy Arena è una soluzione di illuminazione professionale progettata per l'illuminazione sportiva e di aree ad alta palificazione. L'angolo del fascio progettato professionalmente riduce il riverbero e garantisce una distribuzione uniforme della luce. Il design modulare permette di regolare l'illuminazione per ottenere la migliore uniformità luminosa a terra.

Alloggiamento: Alluminio pressofuso

Diffusore: Lente PMMA

LED: Tecnologia LED ad alta efficienza energetica (L80/B10/F10), durata di 50.000 ore, funzionante da -21°C a 56°C.

UK The Arena LED floodlight is a professional lighting solution designed for sports and high-mast area lighting. The specially designed beam angle minimizes glare while ensuring uniform light distribution. The modular design allows for adjustments to achieve optimal light uniformity on the ground.

Housing: Die-cast aluminum

Diffuser: PMMA lens

LED: Energy-efficient LED (L80/B10/F10), 50,000-hour lifespan, operational from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

