



ARGENTO ADJ

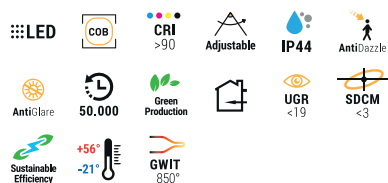

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
TR Triac

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL


FINISHING: White trim
REFLECTOR: Shining Silver
Shining black
Matte gold

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
30004010	10W	500 lm	15°/24°/36°	Ø85	Ø95 X 125 h
30004015	15W	700 lm	15°/24°/36°	Ø85	Ø95 X 125 h
30005015	15W	700 lm	15°/24°/36°	Ø120	Ø130 X 165.5 h
30005020	20W	920 lm	15°/24°/36°	Ø120	Ø130 X 165.5 h
30005025	25W	1100 lm	15°/24°/36°	Ø120	Ø130 X 165.5 h
30005030	30W	1600 lm	15°/24°/40°	Ø120	Ø130 X 145 h
30006015	15W	1050 lm	20°/30°/36°/45°	Ø150	Ø160 X 165 h
30006020	20W	1400 lm	20°/30°/36°/45°	Ø150	Ø160 X 165 h
30006025	25W	1700 lm	20°/30°/36°/45°	Ø150	Ø160 X 165 h
30007030	30W	1950 lm	15°/24°/30°/36°/45°	Ø170	Ø180 X 180 h
30007040	40W	2700 lm	15°/24°/30°/36°/45°	Ø170	Ø180 X 180 h

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Argento Adj è dotato di un potente COB ad alta luminosità grazie al design con doppio riflettore. Questo downlight regolabile offre versatilità, garantendo prestazioni ottimali di illuminazione con un controllo preciso della luce. La sua flessibilità lo rende una scelta ideale per ambienti che richiedono soluzioni di illuminazione dinamiche ed efficienti, adatto sia per spazi residenziali che commerciali.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

Diffusore: Lente PMMA antiabbagliamento

LED: Riduce il consumo energetico con L80/B10/F10, con una durata di 50.000 ore, e funzionante in modo efficace tra -21°C e 56°C.

Argento Adj features a high-power COB downlight with exceptional brightness, thanks to its double reflector design. This adjustable downlight offers versatility while ensuring optimal lighting performance and precise control. Its flexibility makes it an ideal choice for spaces that require dynamic and efficient lighting solutions, making it suitable for both residential and commercial environments.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

Diffuser: Anti-glare PMMA lens

LED: Reduces energy consumption with L80/B10/F10, offering a 50,000-hour lifespan, and operates effectively between -21°C and 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

