
ARIETE

LED · SMD · CRI >80/>90 · IP44 · AntiDazzle · AntiGlare · 50.000 · Green Production · UGR <10 · SDCM <3 · Sustainable Efficiency · +56° -21° · GWIT 850°



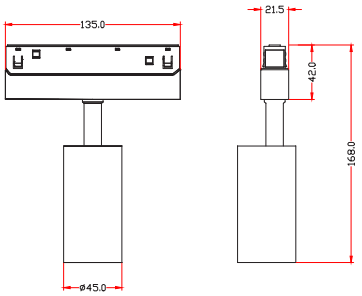

DRIVER OPTIONS

OF On/Off
DL DALI

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL

FINISHING: Black, White

COD.	POWER	LUMEN	B.ANGLE	DIM./SIZE (mm)
41770007	7 W	450lm	15°/24°/36°	134 x 45 x 143 h

BEAM ANGLE



Ariete è una luce da binario magnetico versatile e regolabile, progettata per soddisfare le esigenze di ambienti commerciali e uffici. La verniciatura elettrostatica garantisce una costanza cromatica nel tempo, rendendola una scelta eccellente e affidabile per spazi professionali.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

Diffusore: Vetro trasparente o PMMA

LED: Tecnologia LED avanzata a risparmio energetico (L80/B10/F10), con una durata eccezionale di 50.000 ore, offrendo prestazioni superiori in un intervallo di temperature da -21°C a 56°C.

Ariete is a versatile and adjustable magnetic track light, designed to meet the needs of commercial and office environments. Its electrostatic painting ensures lasting color consistency, making it an excellent and reliable choice for professional spaces.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

Diffuser: Transparent glass or PMMA

LED: Advanced energy-efficient LED technology (L80/B10/F10), with an impressive 50,000-hour lifespan, providing exceptional performance in temperatures ranging from -21°C to 56°C.

COMPLIANCE

LM-79 · TM-21 · LM-80

CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at **www.flussirari.it.** These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.