


ARNO

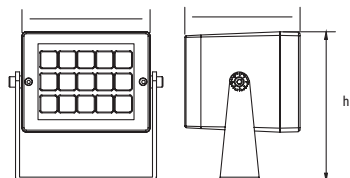

VOLTAGE

AC100-240V 50/60HZ

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming


CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6500K Cool white
RGB


OPTIONAL

FINISHING: Grey

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LED Q.ty	LUMEN	L.COLOUR	B.ANGLE	SIZE (mm)
40985040	40W	15pcs	2800 lm	single	5° 12.5° 20° 30° 48° 60° 15x30° 10x60°	162 x 146 x 189 h
40985030	30W	1pc	2100 lm	single	5° 12.5° 20° 30° 48° 60° 15x30° 10x60°	162 x 146 x 189 h
40985032*	32W	15pcs	1280 lm	RGB	5° 12.5° 20° 30° 48° 60° 15x30° 10x60°	162 x 146 x 189 h

*Only DC24V

Arno è dotato di un resistente alloggiamento in alluminio pressofuso, che offre una protezione eccellente contro corrosione, ruggine e condizioni atmosferiche difficili. I LED sono protetti da una lente in vetro temperato a prova di impatto. Grazie alla tecnologia LED avanzata, questo apparecchio è altamente efficiente, garantendo elevate prestazioni e risparmio energetico con una manutenzione minima. Sostituisce le luci a ioduri metallici (MH) con una durata cinque volte maggiore e una luminosità comparabile. Facile da installare e affidabile in ogni condizione.

Alloggiamento: Alluminio pressofuso verniciato a polvere per una massima durabilità.

Diffusore: Vetro temperato trasparente

Riflettore: Lente ottica

LED: Tecnologia LED ad alta efficienza energetica (L80/B10/F10), durata di 50.000 ore, operativo da -21°C a 56°C.

Arno LED floodlight features a durable die-cast aluminum housing, offering excellent resistance against corrosion, rust, and harsh weather conditions. The LEDs are shielded by an impact-resistant tempered glass lens. Thanks to advanced LED technology, this fixture provides high efficiency, exceptional performance, and energy savings with minimal maintenance. It replaces metal-halide lights (MH) with similar output while lasting five times longer. Easy to install and reliable in all conditions.

Housing: Die-cast aluminum powder-coated for maximum durability.

Diffuser: Transparent tempered glass

Reflector: Optical lens

LED: Energy-efficient (L80/B10/F10), 50,000-hour lifespan, operational from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

