


# ATMOS

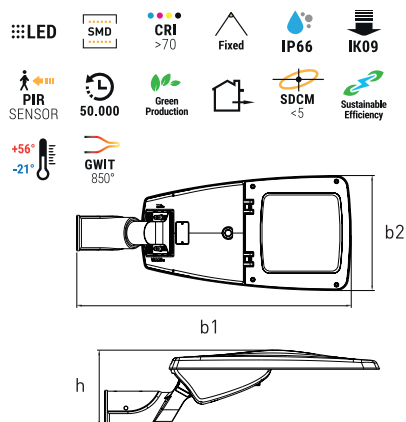

## VOLTAGE

AC220-240V

## DRIVER OPTIONS

OF On/Off  
DL DALI


## CCT OPTIONS

3000K Warm white  
4000K Neutral white  
5000K Cool white


## OPTIONAL

FINISHING: Grey

## BEAM ANGLE



## LIGHT DISTRIBUTION



## COMPLIANCE



## CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



| COD.     | POWER | LUMEN    | B.ANGLE      | SIZE (mm)         |
|----------|-------|----------|--------------|-------------------|
| 41362020 | 20W   | 3200 lm  | 60°/90°/110° | 580 x 236 x 128 h |
| 41362030 | 30W   | 4800 lm  | 60°/90°/110° | 580 x 236 x 128 h |
| 41362040 | 40W   | 6400 lm  | 60°/90°/110° | 580 x 236 x 128 4 |
| 41363060 | 60W   | 9600 lm  | 60°/90°/110° | 681 x 236 x 128 h |
| 41363075 | 75W   | 12000 lm | 60°/90°/110° | 681 x 236 x 128 h |
| 41363100 | 100W  | 16000 lm | 60°/90°/110° | 681 x 236 x 128 h |
| 41364120 | 120W  | 19200 lm | 60°/90°/110° | 750 x 280 x 128 h |
| 41364150 | 150W  | 24000 lm | 60°/90°/110° | 750 x 280 x 128 h |
| 41364180 | 180W  | 28800 lm | 60°/90°/110° | 750 x 280 x 128 h |
| 41362020 | 20W   | 3200 lm  | 60°/90°/110° | 580 x 236 x 128 h |

**IT** Luce professionale stradale. Alte prestazioni, Nichia LED. Facile manutenzione, design anti-polvere. IP66, IK10, anticorrosione e antivibrazione. Protezione da scarica elettrica (10KV). Protezione automatica power-off. Plug-and-Play, facile da assemblare.

**Alloggiamento:** alluminio pressofuso resistente alla corrosione

**Diffusore:** lenti in PMMA, vetro ad alta resistenza alle temperature e alle radiazioni UV

**LED:** risparmio energetico L80/B10/F10 - durata 50.000 h - temperature di lavoro da -21°C a 56°

**UK** Professional roadway lighting. High performance design with Nichia chip. Free-tool maintenance. Sleek design so as to decrease the dust IP66, IK08 rated, anti-corrosion and vibration. 10KV surge protection device. Power-off automatic protection. Plug-and-Play, easy to assembly.

**Housing:** Made of die cast aluminum corrosion resistance

**Diffuser:** optical PMMA lens high resistance to temperature and UV radiation glass

**LED:** reduce energy consumption with L80/B10/F10 - 50.000 hrs lifetime working under temp (-21°C to 56°C)

**!** Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at [www.flussirari.it](http://www.flussirari.it). These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

