


AUREO ADJ

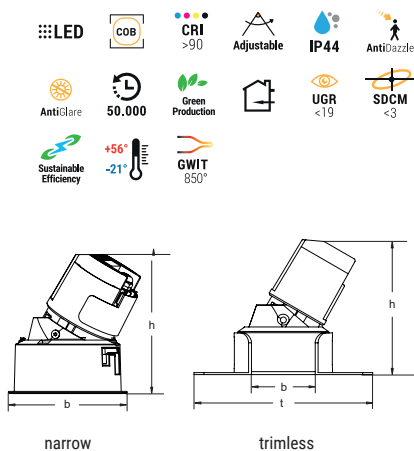

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
TR Triac

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL


FINISHING: White trim
REFLECTOR: Shining Silver
Matte black
Matte gold

COD.	TYPE	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
30012005	narrow	5W	160 lm	15°/24°/36°	Ø50	Ø55 x 72
30012008	narrow	8W	440 lm	15°/24°/36°	Ø50	Ø55 x 72
30013005	narrow	5W	300 lm	15°/24°/36°/60°	Ø75	Ø82 x 80
30013008	narrow	8W	440 lm	15°/24°/36°/60°	Ø75	Ø82 x 80
30013012	narrow	12W	620 lm	15°/24°/36°/60°	Ø75	Ø82 x 100
30014005	trimless	5W	160 lm	15°/24°/36°	Ø50	Ø48 (90 t) x 72
30014008	trimless	8W	440 lm	15°/24°/36°	Ø50	Ø48 (90 t) x 72
30015005	trimless	5W	300 lm	15°/24°/36°/60°	Ø75	Ø74 (145 t) x 80
30015008	trimless	8W	440 lm	15°/24°/36°/60°	Ø75	Ø74 (145 t) x 80
30015012	trimless	12W	620 lm	15°/24°/36°/60°	Ø75	Ø74 (145 t) x 100

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



I Aureo Adj è parte della famiglia Aureo, dotato di un potente COB ad alta luminosità grazie al design con doppio riflettore. Questo downlight regolabile è disponibile sia nella versione stretta che senza bordo, offrendo versatilità per diversi stili di installazione, garantendo al contempo prestazioni ottimali di illuminazione e un controllo preciso della luce. La sua flessibilità lo rende una scelta ideale per ambienti che richiedono soluzioni di illuminazione dinamiche ed efficienti.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

Diffusore: Lente PMMA antiabbagliamento

LED: Riduce il consumo energetico con L80/B10/F10, con una durata di 50.000 ore, e funzionante in modo efficace tra -21°C e 56°C.

UK Aureo Adj is part of the Aureo family, featuring a high-power COB downlight with exceptional brightness, thanks to its double reflector design. This adjustable downlight is available in both narrow and trimless designs, providing versatility for various installation styles while ensuring optimal lighting performance and precise lighting control. Its flexibility makes it an ideal choice for spaces requiring dynamic and efficient lighting solutions.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

Diffuser: Anti-glare PMMA lens

LED: Reduces energy consumption with L80/B10/F10, offering a 50,000-hour lifespan, and operates effectively between -21°C and 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

