
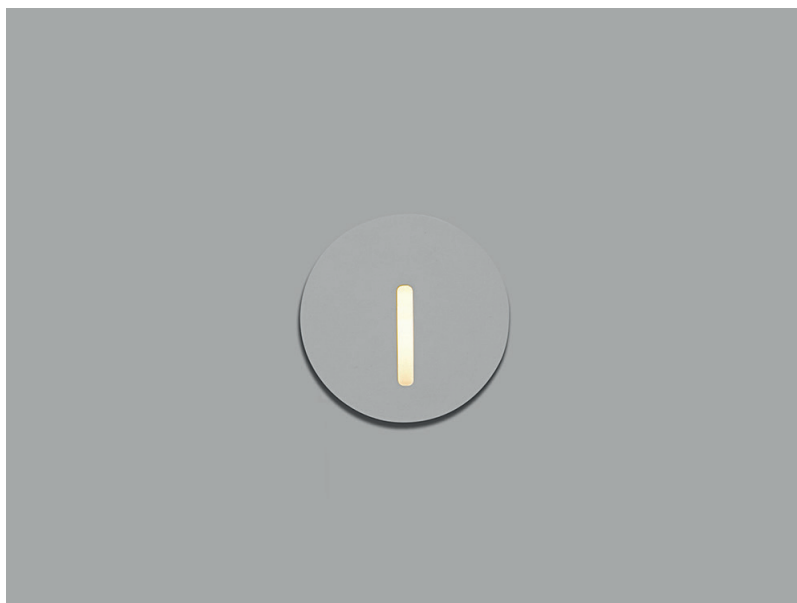



BAGLIORE

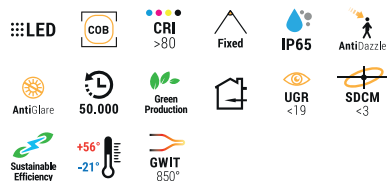

DRIVER OPTIONS	CCT OPTIONS
OF On/Off	2700K Warm white 3000K Warm white 4000K Neutral white 5000K Cool white 6000K Cool white 6500K Cool white
OPTIONAL	

FINISHING: White, Black

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	DIM./SIZE (mm)
41418003	3W	180 lm	Narrow	65	Ø83 x 3

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	25.74	Ø0.89
2	6.436	Ø1.78
3	2.860	Ø2.67
4	1.609	Ø3.57
5	1.030	Ø4.46

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Bagliore è una lampada da parete elegante che combina una cornice sottile con un design curvato, creando un'estetica raffinata e moderna. La sua forma fluida valorizza gli spazi esterni contemporanei, offrendo un perfetto equilibrio tra eleganza, funzionalità e illuminazione d'atmosfera. Realizzato per resistere agli agenti atmosferici, Bagliore garantisce prestazioni affidabili e un'illuminazione uniforme e priva di abbagliamento, perfetta per ambienti moderni.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Tecnologia LED ad alte prestazioni con classificazione L80/B10/F10, durata di 50.000 ore e funzionamento costante con temperature da -21°C a 56°C

Bagliore is a refined wall light that seamlessly combines a narrow bezel with a curved design, creating a sleek and sophisticated aesthetic. Its fluid form enhances contemporary outdoor spaces, delivering a perfect blend of elegance, functionality, and ambient illumination. Built to withstand the elements, Bagliore ensures long-lasting performance while offering smooth, glare-free lighting that enhances any modern setting.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: High-performance LED with an L80/B10/F10 rating, ensuring a 50,000-hour lifespan and consistent performance in temperatures from -21°C to 56°C

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

