



BINARIO UP1

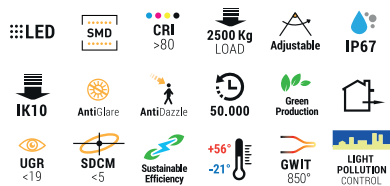

VOLTAGE

AC100-240V / DC24V

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
DX DMX512

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6500K Cool white
RGBW

OPTIONAL


FINISHING: Silver



BEAM ANGLE

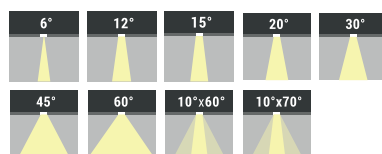

LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Binario UP1 è la fusione perfetta di resistenza, longevità e design moderno, offrendo prestazioni eccezionali per gli spazi esterni. Il modulo illuminante con angolo di fascio regolabile offre effetti di lavaggio delle pareti precisi, migliorando l'esperienza luminosa. La fonte LED integrata garantisce efficienza energetica e un design ecologico, assicurando al contempo elevati standard professionali.

Alloggiamento: Alluminio pressofuso con copertura in acciaio inossidabile #6063, per una protezione robusta e una finitura elegante.

Diffusore: Vetro temperato trasparente per una diffusione uniforme e nitida della luce.

Accessori: Scatola in PVC per un'installazione sicura a terra. Finitura RAL opzionale per un aspetto personalizzato.

LED: LED ad alta efficienza energetica con L80/B10/F10 e una durata di 50.000 ore, progettato per funzionare a temperature da -21°C a 56°C.

Binario UP1 is a perfect blend of strength, longevity, and modern design, offering exceptional performance for outdoor spaces. The adjustable beam angle illuminant module provides precision in wall-washing effects, enhancing the lighting experience. The integrated LED source guarantees both high efficiency and an eco-conscious design, ensuring top-notch professionalism.

Housing: Die-cast aluminum with a stainless steel #6063 cover

Diffuser: Transparent tempered glass

Accessories: PVC box for secure ground installation. Optional RAL finish for customized aesthetics.

LED: Energy-efficient LED with L80/B10/F10 and a 50,000-hour lifespan, designed to operate in temperatures from -21°C to 56°C.

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

