



BINARIO UP2

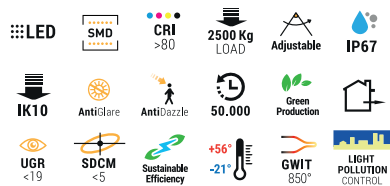

VOLTAGE

AC100-240V / DC24V

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
DX DMX512


CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6500K Cool white
RGBW


OPTIONAL

FINISHING: Silver

BEAM ANGLE

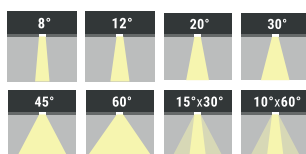


LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES

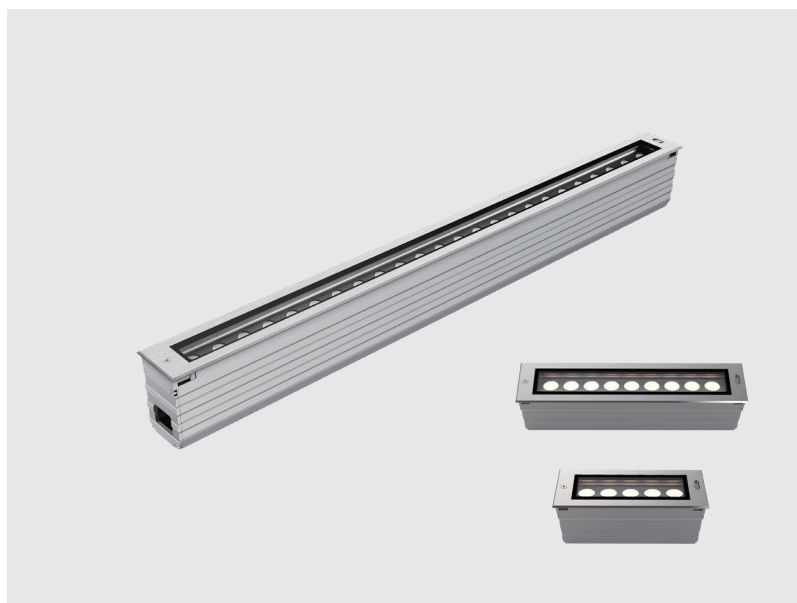

COD.	POWER	LED Q.ty	LUMEN	L.COLOUR	B.ANGLE	HOLE (mm)	SIZE (mm)
41167045	45W	24pcs	3600 lm	single	8°/12.5°/20°/30°/45°/60°/15x30°/10x60°	992x70	1000x80x114h
41167028	28W	24pcs	2240 lm	single	8°/12.5°/20°/30°/45°/60°/15x30°/10x60°	992x70	1000x80x114h
41167014	14W	12pcs	1120 lm	single	8°/12.5°/20°/30°/45°/60°/15x30°/10x60°	492x70	500x80x114h
41167011	11W	8pcs	880 lm	single	8°/12.5°/20°/30°/45°/60°/15x30°/10x60°	292x70	300x80x114h
41167014	30W	10pcs	1120 lm	single	8°/12.5°/20°/30°/45°/60°/15x30°/10x60°	292x70	300x80x114h
41167048	48W	24pcs	1440 lm	RGBW	20°/40°/60°/15x25°/15x60°	992x102	1000x110x130h
41168048	48W	24pcs	1440 lm	RGBW	20°/40°/60°/15x25°/15x60°	492x70	500x80x114h
41168012	12W	6pcs	360 lm	RGB	20°/40°/60°/15x25°/15x60°	292x70	300x80x114h

Binario UP2 è la soluzione resistente e versatile per ogni spazio esterno, progettata per garantire la massima durata anche nelle condizioni più difficili. Questa lumina è resistente alle intemperie, all'umidità e ai carichi pesanti. Il modulo illuminante con angolo di fascio regolabile assicura effetti di lavaggio delle pareti precisi e accurati, creando un'illuminazione elegante e fluida.

Alloggiamento: Alluminio pressofuso con copertura in acciaio inossidabile #6063

Diffusore: Vetro temperato trasparente

Accessori: Scatola in PVC per un fissaggio sicuro a terra. Finitura RAL opzionale per un tocco personalizzato.

LED: LED ad alta efficienza energetica con L80/B10/F10 e una durata di 50.000 ore, efficace a temperature da -21°C a 56°C.

Binario UP2 stands as a strong, versatile solution for any outdoor space, engineered for maximum durability in the most demanding conditions. This luminaire resists weather, humidity, and heavy loads with ease. The adjustable beam angle illuminant module ensures a precise and accurate wall-washing effect, creating a smooth and elegant lighting solution.

Housing: Die-cast aluminum with stainless steel #6063 cover

Diffuser: Transparent tempered glass

Accessories: PVC box for reliable ground fixation. Optional RAL finish for a personalized touch.

LED: High-efficiency LED with L80/B10/F10 and a 50,000-hour lifespan, effective in temperatures ranging from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

