
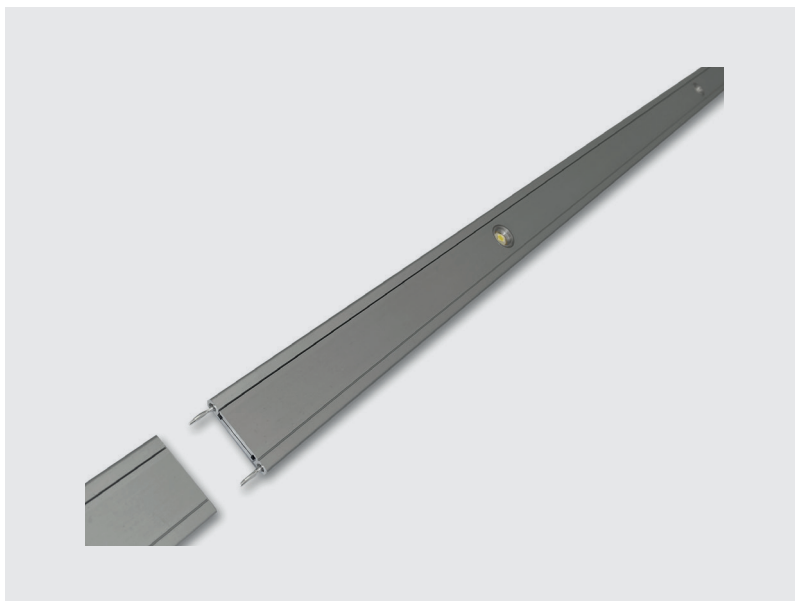


CALIPSO

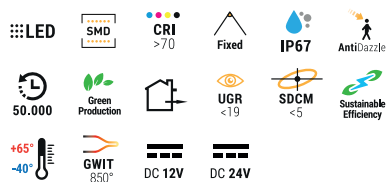

DRIVER OPTIONS

OF On/Off
DL DALI

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

COD.	VOLTAGE	POWER	LUMEN	B.ANGLE	SIZE (mm)
40423003	DC 12V	3.6 W	470 lm	30°/40°/60°/65°/105°/110°	300-1800 x 40 x 6 h
40424003	DC 24V	3.6 W	470 lm	40°/45°/65°/105°/115°	300-1800 x 40 x 6 h

OPTIONAL

FINISHING: On request (20 colors available)

BEAM ANGLE

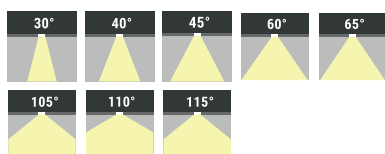

Una soluzione di illuminazione lineare e modulare innovativa con una durata di vita leader del mercato. Il design leggero e robusto in alluminio sottile da 6 mm consente molteplici applicazioni interne ed esterne.

Alloggiamento: alluminio pressofuso

Riflettore: alluminio anodizzato

LED: risparmio energetico L80/B10/F10 - durata 50.000 h - temperature di lavoro da -40°C a 65°C

An innovative linear and modular lighting solution with a market-leading lifespan. The lightweight and robust 6mm slim aluminum design enables multiple indoor and outdoor applications.

Housing: die-cast aluminum

Reflector: anodized aluminum

LED: reduces energy consumption L80/B10/F10 - 50.000 hrs lifetime - working temp -40°C to 65°C

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.


Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.



MOUNTING OPTIONS

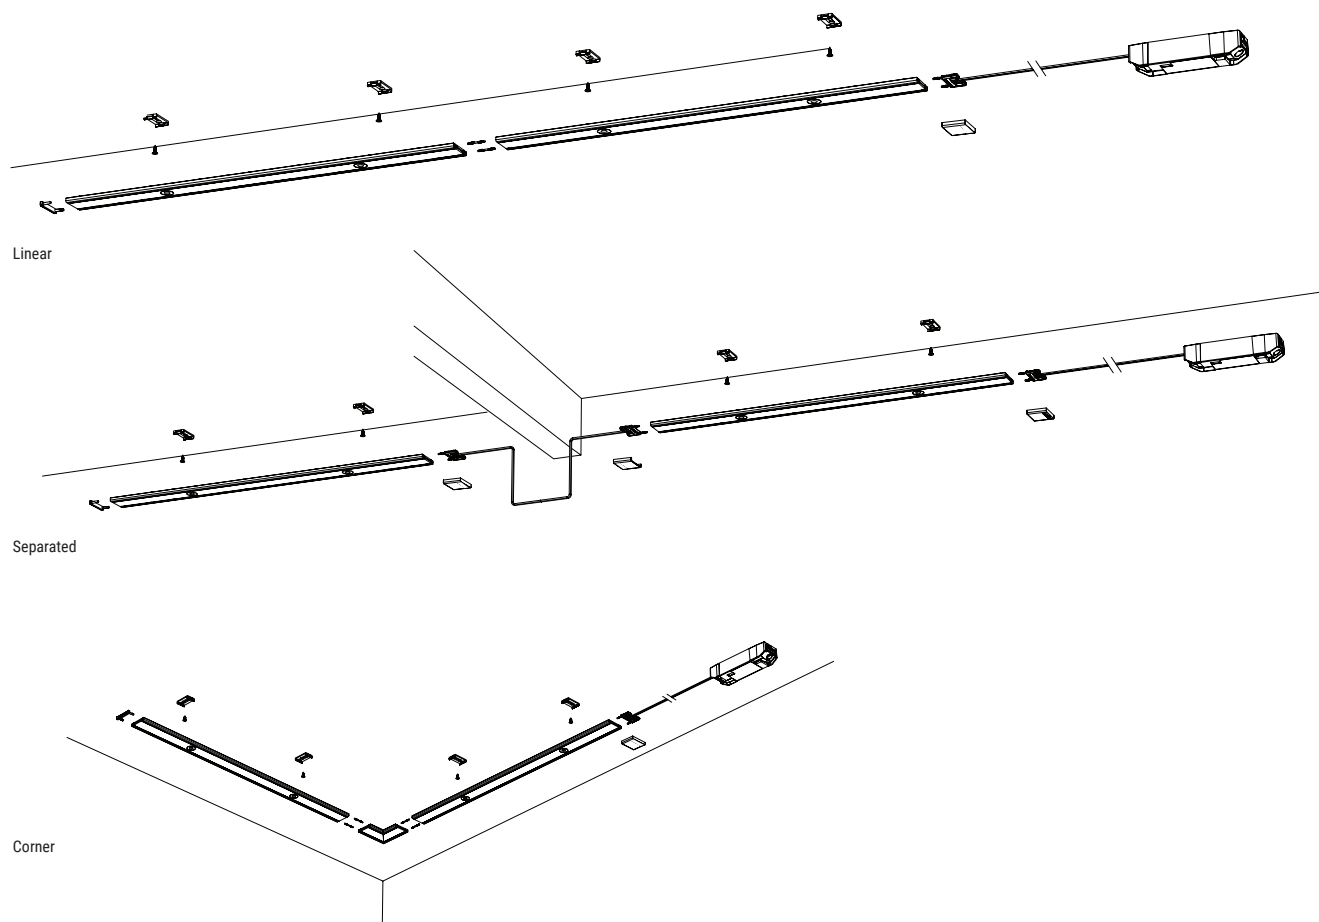

LED DRIVER OPTIONS

40425025

OUTPUT POWER: 25W
LED SPOT RANGE: 3-17
DIMMING: DALI, PUSH
IP RATING: IP20



40425034

OUTPUT POWER: 34W
LED SPOT RANGE: 8-22
DIMMING: DALI, PUSH
IP RATING: IP20



40425075

OUTPUT POWER: 75W
LED SPOT RANGE: <51
DIMMING: -
IP RATING: IP65



40425150

OUTPUT POWER: 150W
LED SPOT RANGE: <101
DIMMING: -
IP RATING: IP65



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.


For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.




ACCESSORIES


40426001
POWER CORD
Size (mm):
3000 x 37 x 5.8




40426002
LINK CORD
Size (mm):
1000 x 37 x 5.8




40426003
CORD CONNECTION BOX
Size (mm):
52 x 36 x 13




40426004
C CONNECTOR
Size (mm):
58 x 58 x 6




40426005
CONNECTOR PIN
Size (mm):
26 x Ø2




40426006
CONNECTOR SOCKET
Size (mm):
18 x Ø4 mm




40426007
POWER CORD COVER
Size (mm):
32 x 40 x 6




40426008
ENDCAP
Size (mm):
16 (3.3) x 40 x 6




40426009
MOUNTING CLIP
Size (mm):
20 x 37 x 6




40426010
TAPE PAD
Size (mm):
19 x 42 x 1 mm



40426011
SURFACE CLEANER
Size (mm):
59 x 80 x 3 mm



40426001
ALLEN KEY
Size (mm):
51 x 19 x 2



COMPLIANCE

LM-79 TM-21 LM-80

CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.



SPECIFICATIONS

OVERVIEW	TECHNOLOGY	LED Technology
	MATERIAL	Aluminium
	PANEL COLOR	20 colors (anodized)
	HEIGHT / WIDTH	6 mm / 40 mm
	PANEL LENGTH	300 mm - 1800 mm (up to 40 m connected)
	IP	IP20 / IP67
	VOLTAGE	12 or 24 VDC
	POWER CONSUMPTION	1 W per LED spot (max 3,6 W)
	EFFICIENCY	Up to 193 lm/W
	LUMINOUS FLUX	200 lm per LED spot (max 550 lm)
	COLOR TEMPERATURE	3000K, 4000K or 6500K (other on request)
	COLOR RENDERING INDEX	+90
	ROHS COMPLIANT	Yes
	REACH COMPLIANT	Yes
	DIMMABLE	Yes
ELECTRICAL	DESIGNED AND PRODUCED IN	Denmark
	VOLTAGE RANGE	24 VDC
	POWER CONSUMPTION	1,5 W / LED spot (max 3,6 W)
	DIMMABLE	Yes
PHOTOMETRIC	INGRESS PROTECTION	IP20 or IP67
	LUMINOUS FLUX	200 lm / LED spot (max 470 lm)
	LUMINAIRE EFFICACY	135 lm/W (up to 157 lm/W)
	CORRELATED COLOR TEMPERATURE	3000 K or 4000 K
CONFORMITY	COLOR RENDERING INDEX	+90
	MARKING	CE
	ROHS COMPLIANT	Yes
LIFETIME	REACH COMPLAINT	Yes
	L80 @TA 25°C	>50.000 hrs

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.



Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.