


CATENA-R

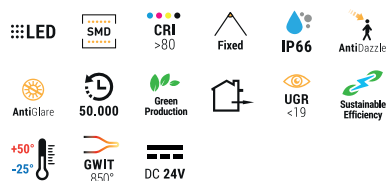

VOLTAGE

ON/OFF: AC100-240V/DC24V
DMX512: DC24V

DRIVER OPTIONS

OF On/Off
DX DMX512
RD RDM

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white
RGBW

OPTIONAL

FINISHING: Black, White, Silver

ACCESSORIES: Honeycomb louver, anti-glare shield

BEAM ANGLE



COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
40996060	60W	4800 lm	6°/12°/20°/30°/45°/60°/10x70°/5x20°	775 x 56 x 165 h
40996075	75W	6000 lm	6°/12°/20°/30°/45°/60°/10x70°/5x20°	978 x 56 x 165 h
40996090	90W	7200 lm	6°/12°/20°/30°/45°/60°/10x70°/5x20°	1181 x 56 x 165 h

Catena-R è un faretto all'avanguardia progettato per ampie aree all'aperto. Realizzato per precisione e durata, l'alloggiamento è in alluminio pressofuso, con una rifinitura opzionale in acciaio inox 316/314 per un tocco di eleganza. La lente specializzata offre un'opzione asimmetrica, fornendo una soluzione di illuminazione personalizzata per il tuo ambiente.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Tecnologia LED ad alta efficienza energetica (L80/B10/F10), durata di 50.000 ore, funzionante da -25°C a 50°C.

Catena-R is a cutting-edge luminaire designed for large outdoor spaces. Built for precision and durability, its housing is crafted from die-cast aluminum, with an optional 316/314 stainless steel trim for added elegance. The specialized lens provides an asymmetrical option, delivering a customized lighting solution for your environment.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Energy-efficient LED (L80/B10/F10), 50,000-hour lifespan, operating in temperatures from -25°C to 50°C.

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.


Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.


Compliance may vary in each power supply based on country-specific technical regulations.



LIGHT DISTRIBUTION

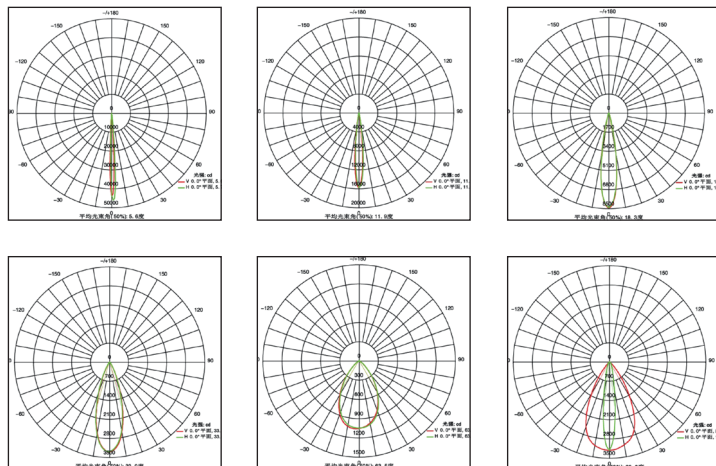

DIMENSIONS

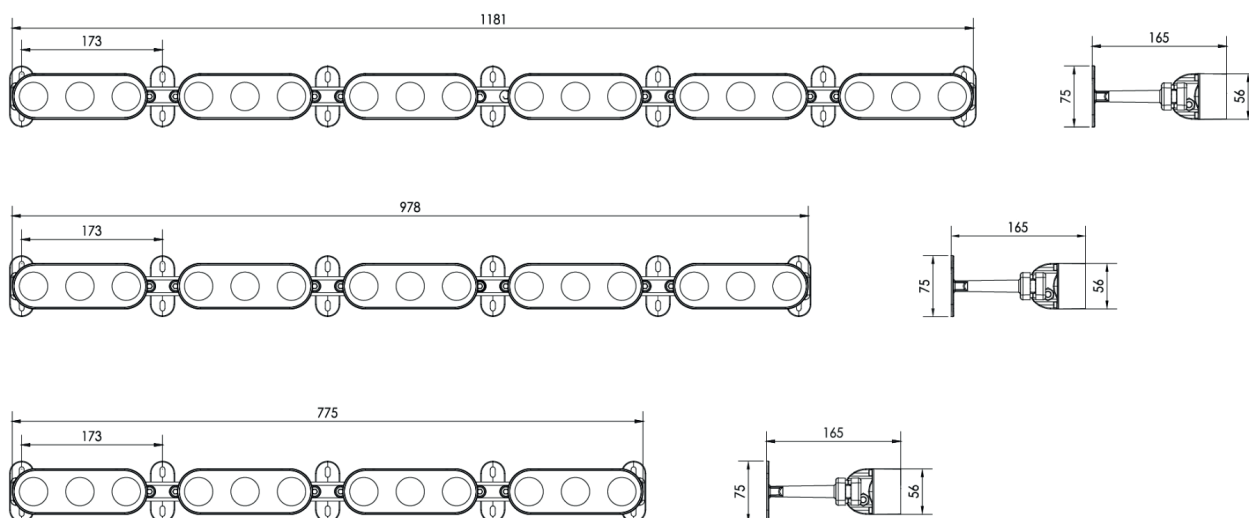

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

