

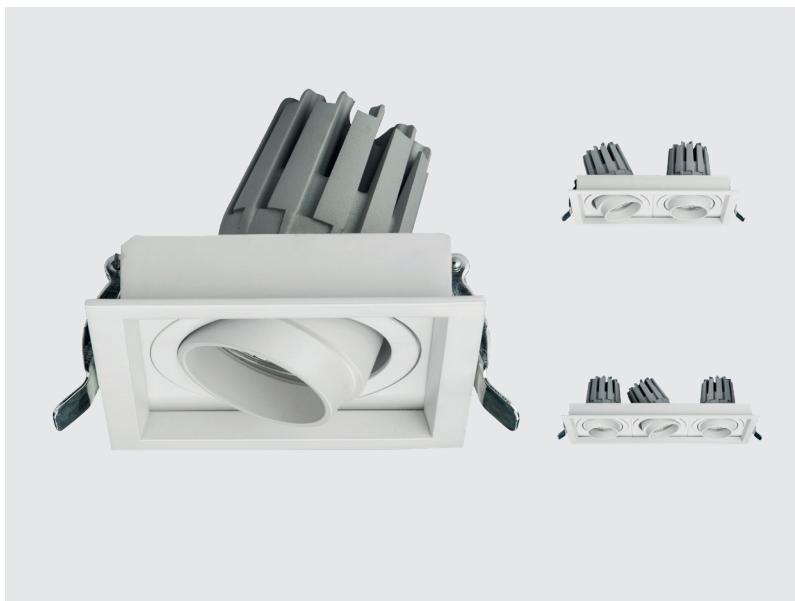


CAVIER

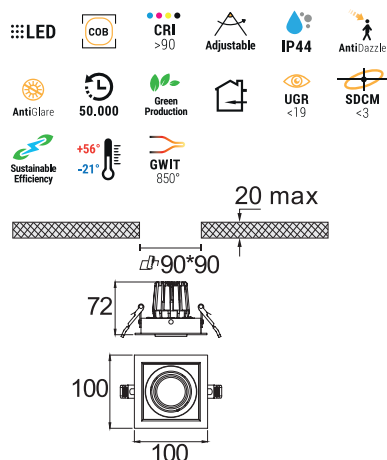

DRIVER OPTIONS	CCT OPTIONS
OF On/Off	3000K Warm white
DL DALI	4000K Neutral white
IV 1/10V dimming	
TR Triac	
PH Phase dimming	
OPTIONAL	
FINISHING: White	

BEAM ANGLE



COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
41837008	8W	657 lm	15°/24°/38°	90 x 90	100 x 100 x 72 h
41837010	10W	788 lm	15°/24°/38°	90 x 90	100 x 100 x 72 h
41838016	2x8W	1313 lm	15°/24°/38°	168 x 90	178 x 100 x 72 h
41838020	2x10W	1577 lm	15°/24°/38°	168 x 90	178 x 100 x 72 h
41839024	3x8W	1970 lm	15°/24°/38°	245 x 90	255 x 100 x 72 h
41839030	3x10W	2365 lm	15°/24°/38°	245 x 90	255 x 100 x 72 h
41840015	15W	1279 lm	15°/24°/36°	125 x 125	136 x 136 x 96 h
41840020	20W	1534 lm	15°/24°/36°	125 x 125	136 x 136 x 96 h
41841030	2x15W	2557 lm	15°/24°/36°	235 x 125	247 x 136 x 96 h
41841040	2x20W	3067 lm	15°/24°/36°	235 x 125	247 x 136 x 96 h
41842045	3x15W	3836 lm	15°/24°/36°	345 x 125	360 x 136 x 96 h
41842060	3x20W	4601 lm	15°/24°/36°	345 x 125	360 x 136 x 96 h
41843030	30W	2624 lm	15°/24°/36°	173 x 173	183 x 183 x 155 h
41843040	40W	3326 lm	15°/24°/36°	173 x 173	183 x 183 x 155 h
41844060	2x30W	5249 lm	15°/24°/36°	325 x 173	340 x 183 x 155 h
41844080	2x40W	6653 lm	15°/24°/36°	325 x 173	340 x 183 x 155 h
41845090	3x30W	7873 lm	15°/24°/36°	485 x 173	500 x 183 x 155 h
41845120	3x40W	9979 lm	15°/24°/36°	485 x 173	500 x 183 x 155 h

Cavier è una famiglia di faretti a incasso a sospensione cardanica Cavier, con telaio a sorgente singola o multipla. Un downlight regolabile in profondità e basso abbagliamento che utilizza un sistema di regolazione universale con una regolazione completa di 45 gradi senza distorsione del raggio.

Alloggiamento: alluminio pressofuso

Riflettore: alluminio anodizzato

Diffusore: lenti in vetro temperato o in policarbonato

LED: risparmio energetico L80/B10/F10 - durata 50.000 h - temperatura di lavoro da -21°C a 56°

Cavier Recessed gimbal downlight family, with single or multi engine frame. A deep set, low glare adjustable downlight using a universal adjustment system; with a full 45 degree adjustment without beam distortion.

Housing: die cast aluminium

Reflector: anodized aluminium

Diffuser: tempered glass lens or PMMA Lens

LED: reduce energy consumption with L80/B10/F10 - 50.000 hrs lifetime working under temp (-21°C to 56°C)

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

