



CLASS QUADRO

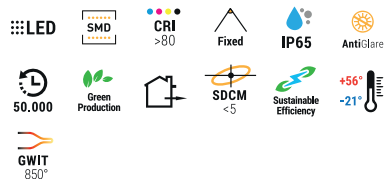

DRIVER OPTIONS	CCT OPTIONS
OF On/Off	2700K Warm white
IV 1/10V dimming	3000K Warm white
	4000K Neutral white
	6000K Cool white

COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
41253004	4W	102 lm	Asymmetric	110 x 110 x 32
41256012	12W	375 lm	Asymmetric	200 x 200 x 32
41258012	12W	375 lm	Asymmetric	270 x 120 x 32


OPTIONAL

FINISHING: Black

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Class Quadro è progettato per valorizzare le pareti esterne, ideale per aggiungere un tocco di classe in qualsiasi ambiente. Il sistema LED ad alta efficienza garantisce performance ottimali con un notevole risparmio energetico. I materiali selezionati con cura assicurano una lunga durata nel tempo e resistenza agli agenti atmosferici.

Alloggiamento: Alluminio pressofuso verniciato a polvere

Diffusore: Vetro temperato trasparente

LED: Tecnologia LED avanzata che riduce il consumo energetico (L80/B10/F10), con una durata di 50.000 ore, progettato per funzionare in temperature da -21°C a 56°C.

Class Quadro is designed to elevate the aesthetics of outdoor walls, perfect for adding a sophisticated touch to any environment. Its high-efficiency LED system ensures optimal performance while conserving energy. Carefully selected materials provide outstanding durability and weather resistance, guaranteeing a long operational lifespan.

Housing: Die-cast aluminum powder coated

Diffuser: Tempered clear glass

LED: Advanced LED technology reduces energy consumption (L80/B10/F10), providing a 50,000-hour lifespan, designed to function in temperatures ranging from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

