



CONICA WIRING

RGB A

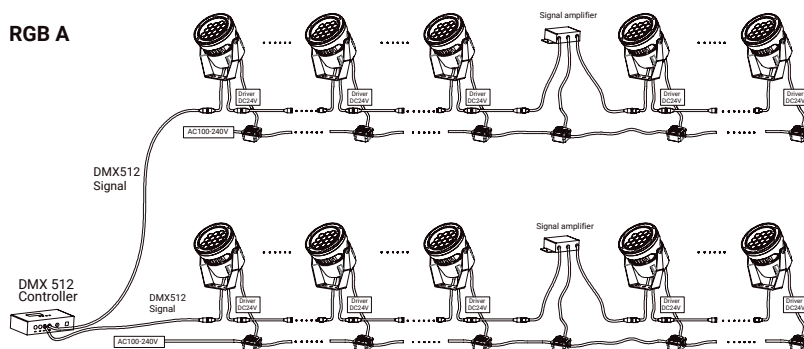

RGB B

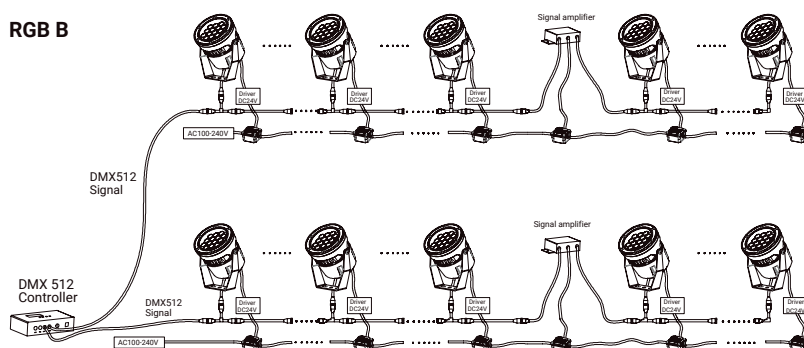

(Single Color)



CONICA ACCESSORIES

Orientable Arm Flood installation



Spike Spike installation



Pole Horizontal installation



Visor Flood installation



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.


Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.



CONICA

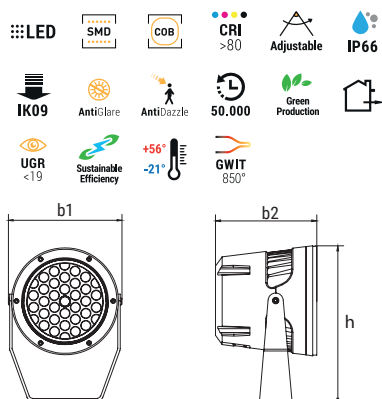

VOLTAGE

ON/OFF: AC100-240V/DC24V
DMX512: DC24V

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
DX DMX512
RD RDM

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6500K Cool white
RGB

OPTIONAL


FINISHING: Grey

INSTALLATION: Flood / Flood U Bracket
Pole Horizontal
Spike

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LED Q.ty	LUMEN	L.COLOUR	B.ANGLE	SIZE (mm)
40970105	105W	36pcs	8925 lm	single	8°/12.5°/20°/30°/45°/60°/15x30°/10x60°	234 x 200 x 312 h
40970060	60W	36pcs	5100 lm	single	8°/12.5°/20°/30°/45°/60°/15x30°/10x60°	234 x 200 x 312 h
40970030	30W	18pcs	2400 lm	single	8°/12.5°/20°/30°/45°/60°/15x30°/10x60°	180 x 163 x 230 h
40971016	16W	7pcs	1120 lm	single	8°/12.5°/20°/30°/45°/60°/15x30°/10x60°	95 x 125 x 154 h
40971012	12W	1pc	840 lm	single	15°	95 x 125 x 154 h
40971007	7W	6pcs	490 lm	single	8°/12.5°/20°/30°/45°/60°/15x30°/10x60°	95 x 125 x 154 h
40971003	3W	1pc	135 lm	single	15°/28°	50 x 65 x 89 h
40971001	1.5W	1pc	68 lm	single	15°/28°	50 x 65 x 89 h
40970086*	86W	36pcs	3440 lm	RGB	8°/12.5°/20°/30°/45°/60°/15x30°/10x60°	234 x 200 x 312 h
40970050*	50W	24pcs	2000 lm	RGB	8°/12.5°/20°/30°/45°/60°/15x30°/10x60°	234 x 200 x 312 h
40971030*	30W	18pcs	1200 lm	RGB	8°/12.5°/20°/30°/45°/60°/15x30°/10x60°	180 x 163 x 230 h

*Only DC24V

Conica offre prestazioni eccezionali garantendo al contempo efficienza energetica, comfort e sicurezza. Realizzato con materiali di alta qualità, assicura una lunga durata e resistenza alle condizioni climatiche difficili. Disponibile in diverse configurazioni e potenze, Conica fornisce luce uniforme, intensa e confortevole con bassa abbagliamento, ideale per ogni spazio esterno.

Alloggiamento: Alluminio pressofuso, verniciato a polvere per maggiore durata.

Diffusore: Vetro temperato trasparente

Riflettore: Lente ottica

LED: LED ad alta efficienza energetica (L80/B10/F10), durata di 50.000 ore, funzionante da -21°C a 56°C.

Conica delivers exceptional performance while ensuring energy efficiency, comfort, and safety. Crafted with high-quality materials, it offers a long lifespan and resilience against harsh weather conditions. Available in various designs and wattage options, Conica provides bright, uniform, and comfortable light with low glare, perfect for any outdoor space.

Housing: Die-cast aluminum, powder-coated

Diffuser: Transparent tempered glass

Reflector: Optical lens

LED: Energy-efficient LED (L80/B10/F10), 50,000-hour lifespan, operating from -21°C to 56°C.

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

