



CRISTALLATO

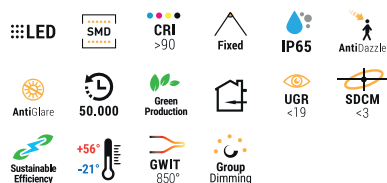

RECESSED / A INCASSO

DRIVER OPTIONS

OF On/Off
IV 1/12V dimming

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white
RGB

OPTIONAL

FINISHING: White, Black, Chrome

COD.	POWER	LUMEN	HOLE (mm)	DIM./SIZE (mm)
42929005	0.5W	30 lm	Ø20	Ø25 X 36 h

Cristallato è un faretto ultra-mini incassato con una forma unica a goccia di cristallo, che crea un effetto visivo sorprendente e rende ogni ambiente speciale. Disponibile con opzioni RGB o CCT singolo, offre una funzione di regolazione della luminosità a tensione costante 12V per esperienze di illuminazione personalizzabili.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Riduce il consumo energetico con una valutazione L80/B10/F10, garantendo una durata di 50.000 ore e prestazioni affidabili in un intervallo di temperature da -21°C a 56°C.

Cristallato is an ultra-mini recessed spotlight with a unique crystal drop shape that creates a stunning visual effect, making any space feel special. Available with RGB or single CCT options, it features a 12V constant voltage dimming function for customizable lighting experiences.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Reduces energy consumption with an L80/B10/F10 rating, providing a 50,000-hour lifespan and reliable performance in temperatures ranging from -21°C to 56°C.

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

