



CROMO

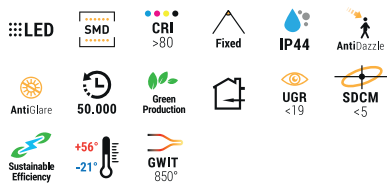

DRIVER OPTIONS	CCT OPTIONS
OF On/Off	2700K Warm white
DL DALI	3000K Warm white
	4000K Neutral white
	5000K Cool white
	6000K Cool white
	6500K Cool white
OPTIONAL	

FINISHING: White, Black
ACCESSORIES: 1.8 m prewired on cord dimmer

COD.	POWER	LUMEN	DIM./SIZE (mm)
41290006	6W	500 lm	Ø20 x 70 x 400 h

Cromo è una luce da parete tubolare dal design continuo con una scatola murale circolare, che aggiunge un tocco contemporaneo agli interni moderni. Il suo stile minimalista si integra perfettamente in vari ambienti, offrendo un'illuminazione efficiente con un fascino sofisticato.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Tecnologia LED a basso consumo con una classificazione L80/B10/F10, con una durata di 50.000 ore. Funziona in un intervallo di temperatura da -21°C a 56°C, garantendo affidabilità a lungo termine e un'illuminazione costante.

Cromo is a sleek tubular wall light with a continuous design and a circular wall box, offering a contemporary touch for modern interiors. Its minimalist style seamlessly integrates into various spaces, providing efficient lighting with a sophisticated appeal.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Energy-efficient LED technology with an L80/B10/F10 rating, providing a 50,000-hour lifespan. Operates in a temperature range of -21°C to 56°C, ensuring long-term reliability and consistent illumination.

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

