
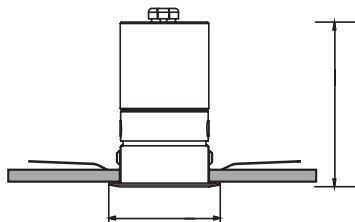


CRUNA

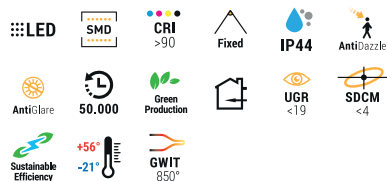

RECESSED / A INCASSO

DRIVER OPTIONS

OF On/Off

CCT OPTIONS

2700K Warm white
 3000K Warm white
 4000K Neutral white
 5000K Cool white
 6000K Cool white
 6500K Cool white


OPTIONAL

FINISHING: White trim


REFLECTOR: Shining silver
 Matte gold
 Matte black

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
30165002	2W	50 lm	11°/15°/20°/25°/30°/36°	Ø17	Ø19 X 31 h
30166002	2W	65 lm	11°/15°/20°/25°/30°/36°	Ø25	Ø26 X 39 h
30167003	3W	120 lm	11°/15°/20°/25°/30°/36°	Ø35	Ø37 X 52 h
30168003	3W	120 lm	11°/15°/20°/25°/30°/36°	Ø45	Ø50 X 62 h
30168005	5W	200 lm	11°/15°/20°/25°/30°/36°	Ø45	Ø50 X 62 h
30168008	8W	400 lm	11°/15°/20°/25°/30°/36°	Ø45	Ø50 X 74 h

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Cruna è un faretto compatto con un design elegante e minimale a struttura unica. Grazie alla distribuzione della luce progettata con attenzione, offre un'illuminazione morbida e confortevole, ideale per una varietà di applicazioni.

Alloggiamento: Alluminio pressofuso con struttura brevettata per la dissipazione del calore e design Upcast per una dissipazione ottimale del calore.

Riflettore: Alluminio anodizzato

LED: Riduce il consumo energetico con L80/B10/F10, garantendo una durata di 50.000 ore e prestazioni affidabili in un intervallo di temperature da -20°C a 50°C.

Cruna is a compact spotlight with a sleek, minimal design and a one-piece structure. Featuring expertly engineered light distribution, it provides soft and comfortable illumination, making it perfect for various applications.

Housing: Die-cast aluminum with a patented heat radiation structure and Upcast air design for optimal heat dissipation.

Reflector: Anodized aluminum

LED: Reduces energy consumption with L80/B10/F10, offering a 50,000-hour lifespan and dependable performance in temperatures from -20°C to 50°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

