



DELIA QUADRO ADJ

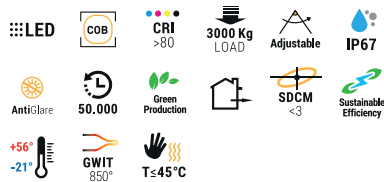

VOLTAGE

AC100-240V (6W)
AC220-240V (11W)

DRIVER OPTIONS

OF On/Off

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white




COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
41112006	6W	487 lm	15°/24°/36°/50°	Ø 118	116 x 116 x 163 h
41113011	11W	931 lm	15°/24°/36°/50°	Ø 118	116 x 116 x 163 h


OPTIONAL

FINISHING: Silver

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Delia Quadro Adj è un faretto interrato compatto e resistente, progettato per resistere alle condizioni più difficili. Realizzato per offrire prestazioni durature, unisce forza eccezionale e un design moderno. Progettato per sopportare carichi pesanti e condizioni climatiche estreme, è dotato di tecnologia LED ad alta efficienza, che garantisce un'illuminazione brillante con un consumo minimo di energia. Perfetto per l'illuminazione di vialetti o giardini, il Delia Quadro Adj assicura una luce affidabile e sostenibile per molti anni.

Alloggiamento: Corpo in alluminio pressofuso con copertura in acciaio inossidabile

Diffusore: Vetro temperato trasparente

LED: Tecnologia LED ad alta efficienza (L80/B10/F10) con una durata di 50.000 ore, prestazioni costanti anche a temperature da -21°C a 56°C.

Delia Quadro Adj is a robust and compact in-ground luminaire designed to thrive in tough environments. Built for long-lasting performance, it combines exceptional strength with a modern, refined design. Engineered to endure heavy loads and extreme weather conditions, this fixture is powered by energy-efficient LED technology, delivering brilliant light output with minimal power usage. Whether you're lighting a driveway or a garden, the Delia Quadro Adj ensures reliable, sustainable illumination over many years.

Housing: Die-cast aluminum body with a sleek stainless steel cover

Diffuser: Clear tempered glass

LED: Energy-efficient LED (L80/B10/F10) with a 50,000-hour lifespan, performing consistently in temperatures from -21°C to 56°C

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

