



DORATO R

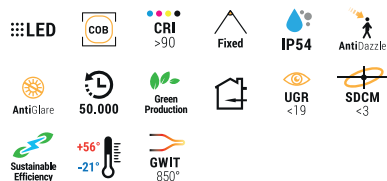

RECESSED / A INCASSO

DRIVER OPTIONS

OF On/Off

CCT OPTIONS


2700K Warm white
 3000K Warm white
 4000K Neutral white
 5000K Cool white
 6000K Cool white
 6500K Cool white

OPTIONAL

FINISHING: White, Black

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	DIM./SIZE (mm)
42919010	10W	700 lm	15°/24°/36°	Ø64	Ø70 x 58 h

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	1286	Ø0.64
2	321.4	Ø1.28
3	142.8	Ø1.93
4	80.35	Ø2.57
5	51.43	Ø3.22

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Italy Dorato R è una luce a soffitto con un design compatto e incassato che porta un tocco sofisticato, caldo e moderno a qualsiasi ambiente. È ideale per interni contemporanei, adattandosi facilmente sia a decorazioni minimaliste che più sontuose. Che si tratti di illuminare un soggiorno, una camera da letto o un ufficio, Dorato R arricchisce l'atmosfera mentre offre una luce morbida e funzionale.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: LED a basso consumo con classificazione L80/B10/F10, con una durata di 50.000 ore. Funziona in un intervallo di temperatura da -21°C a 56°C, garantendo prestazioni affidabili nel tempo.

UK Dorato R is a ceiling surface light featuring a compact and recessed design that brings a sophisticated, warm, and modern touch to any space. It's ideal for contemporary interiors, effortlessly complementing both minimalist and lavish decor styles. Whether you're illuminating a living room, bedroom, or office, Dorato R enhances the ambience while providing functional, soft light.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Energy-efficient LED with an L80/B10/F10 rating, providing a 50,000-hour lifespan. Operates within a temperature range of -21°C to 56°C, ensuring reliable performance over time.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

