


DORE 2

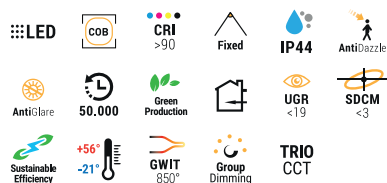

DRIVER OPTIONS

OF On/Off
PH Phase dimming
DL DALI

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL

FINISHING: White, Black

COD.	POWER	LUMEN	DIM./SIZE (mm)
42931020	20W	1531 lm	1125 x 90 x 33 h

LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	189.5	Ø2.57
2	47.37	Ø5.15
3	21.05	Ø7.73
4	11.84	Ø10.31
5	7.570	Ø12.89

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



I Dore 2 è una luce da sottopensile con montaggio a superficie, con driver incorporato e interruttore. Ideale per migliorare l'illuminazione di cucine o spazi di lavoro, offre un basso consumo energetico e una grande durata con una vita utile di 50.000 ore. Progettato per funzionare in modo efficiente in un ampio intervallo di temperature, è una scelta pratica e affidabile.

Alloggiamento: Alluminio pressofuso per una finitura durevole e di alta qualità, che garantisce una protezione di lunga durata.

Riflettore: Alluminio anodizzato per migliorare la riflessione della luce e l'efficienza.

LED: Basso consumo energetico con classificazione L80/B10/F10, garantendo una durata eccezionale di 50.000 ore e progettato per funzionare a temperature comprese tra -21°C e 56°C.

UK Dore 2 is a sleek surface mount undercabinet light featuring a built-in phase cut dimming LED driver and a switch. Ideal for enhancing kitchen or workspace lighting, it offers low energy consumption and high durability with a lifespan of 50,000 hours. Designed to operate efficiently within a wide temperature range, this fixture is a practical and reliable choice.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Low energy consumption with L80/B10/F10 rating, offering a remarkable lifespan of 50,000 hours, and designed to operate in temperatures ranging from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

