
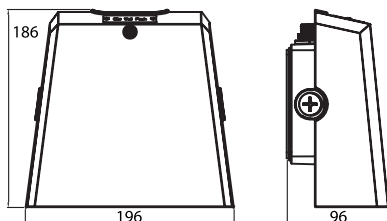


EDER

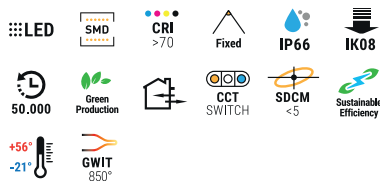

DRIVER OPTIONS

OF On/Off

CCT OPTIONS

3000K Warm white
 4000K Neutral white
 5000K Cool white
 CCT CCT Changeable

OPTIONAL

FINISHING: Grey
 Bronze


FUNCTION: Motion sensor

COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
41278010	10W	1250 lm	150°	196 x 96 x 186 h
41278020	20W	2500 lm	150°	196 x 96 x 186 h
41278030	30W	3750 lm	150°	196 x 96 x 186 h
41278040	40W	5000 lm	150°	196 x 96 x 186 h
41278070	70W	8750 lm	150°	196 x 96 x 186 h

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



La luce Eder ha un design lineare, è leggera e progettata per un uso duraturo senza manutenzione e prestazioni eccezionali. Questa luce è progettata per sostituire rapidamente e facilmente i tradizionali apparecchi di illuminazione.

Alloggiamento: alluminio pressofuso

Diffusore: policarbonato

LED: risparmio energetico L80/B10/F10 - durata 50.000h - temperatura di lavoro da -21°C a 56°

Eder light is low profile, light weight, and designed for long life usage with no maintenance and great performance. This light is designed to quickly and easily upgrade traditional wall light fixtures.

Housing: die cast aluminum

Diffuser: polycarbonate

LED: reduce energy consumption with L80/B10/F10 - 50.000 hrs lifetime working under temp (-21°C to 56°C)

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

