



ELEGANZA

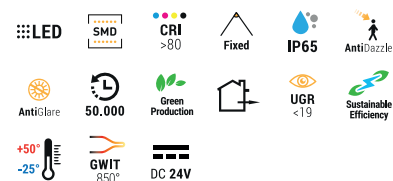

VOLTAGE

ON/OFF: AC100-240V/DC24V
DMX512: DC24V

DRIVER OPTIONS

OF On/Off
DX DMX512

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white
RGBW

OPTIONAL


FINISHING: Black, White, Silver

ACCESSORIES: Honeycomb louver, anti-glare shield

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
40998020	20W	600 lm	8x180°	165 x 73 x 55 h

Progettato per illuminare facciate e creare affascinanti effetti di illuminazione architettonica sulle finestre, il nostro prodotto introduce una soluzione sofisticata e versatile per arricchire gli spazi esterni.

Alloggiamento: Realizzata in resistente alluminio pressofuso, la struttura assicura robustezza e longevità. Ideale per l'illuminazione delle facciate, si fonde armoniosamente con un design elegante.

Riflettore: Il riflettore in alluminio anodizzato è progettato con precisione per ottimizzare la distribuzione della luce, creando affascinanti effetti di illuminazione architettonica sulle finestre. Il suo design garantisce un'illuminazione uniforme e suggestiva.

LED: risparmio energetico L80/B10/F10 - durata 50.000 h - temperatura di lavoro da -25°C a 50°C

Tailored for illuminating facades and crafting mesmerizing architectural lighting effects on windows, our product introduces a sophisticated and versatile solution to enhance outdoor spaces.

Housing: Crafted from durable die-cast aluminum, the housing ensures resilience and longevity. Ideal for facade illumination, it seamlessly blends functionality with a sleek design.

Reflector: The anodized aluminum reflector is precision-engineered to optimize light distribution, creating captivating architectural lighting effects on windows. Its design guarantees uniform and atmospheric illumination.

LED: reduces energy consumption L80/B10/F10 - 50.000 hrs lifetime - working temp -25°C to 50°C

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

