



ELLE

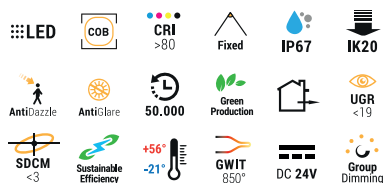

VOLTAGE

DC24V

DRIVER OPTIONS

OF On/Off

CCT OPTIONS

2700K Warm white
 3000K Warm white
 4000K Neutral white
 5000K Cool white
 6000K Cool white
 6500K Cool white

OPTIONAL

FINISHING: Stainless Steel, Black

BEAM ANGLE




LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	211.1	Ø0.35
2	52.78	Ø0.70
3	23.46	Ø1.04
4	13.20	Ø1.39
5	8.445	Ø1.74

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES

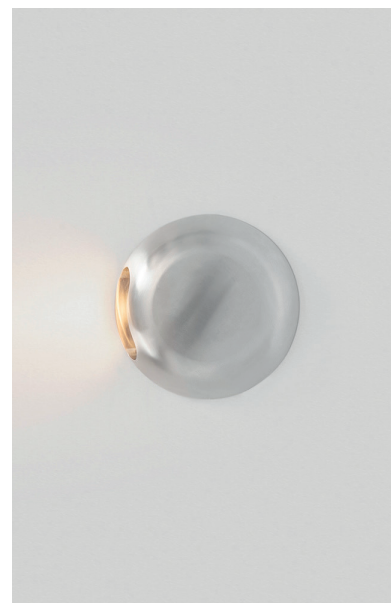

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	DIM./SIZE (mm)
41185002	2W	75 lm	15°/30°/60°	Ø55	Ø60 x 72 h

Elle è una robusta ed elegante luce da passaggio/traffico, progettata per emettere luce lateralmente, creando un effetto lavante unico e una morbida illuminazione sul pavimento. Progettata per garantire durata e sicurezza, è ideale per applicazioni a passaggio e traffico. Il top in acciaio inox aggiunge un tocco di modernità ed eleganza al design di questa luce, combinando funzionalità e stile raffinato.

Alloggiamento: Alluminio pressofuso.

Riflettore: Alluminio anodizzato.

LED: LED ad alta efficienza con prestazioni L80/B10/F10, durata di 50.000 ore e funzionamento affidabile in un intervallo di temperature da -21°C a 56°C.

Elle is a robust and stylish walk/drive-over light fixture, designed to emit light from the side, creating a unique washer effect and a soft flood on the floor. Crafted for durability and safety, it's perfect for both walk and drive-over applications. The stainless steel top enhances the modern elegance of this fixture, combining functionality with sleek design.

Housing: Die-cast aluminium.

Reflector: Anodized aluminium.

LED: Energy-efficient LED with L80/B10/F10 ratings, offering a 50,000-hour lifespan and reliable operation in temperatures from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.



Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.