



## ETERNA

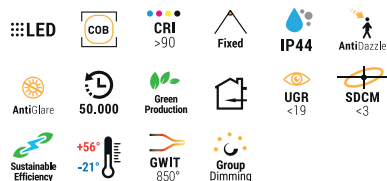

## DRIVER OPTIONS

OF On/Off  
PH Phase dimming

## CCT OPTIONS

2700K Warm white  
3000K Warm white  
4000K Neutral white  
5000K Cool white  
6000K Cool white  
6500K Cool white


## OPTIONAL

FINISHING: White, Black



| COD.     | POWER | LUMEN  | B. ANGLE    | DIM./SIZE (mm) |
|----------|-------|--------|-------------|----------------|
| 41551009 | 9W    | 650 lm | 24°/36°/45° | Ø70 x 140 h    |

## BEAM ANGLE



## LIGHT DISTRIBUTION

| h(m) | E(lx) | Ø(m)  |
|------|-------|-------|
| 1    | 1150  | Ø0.66 |
| 2    | 287.5 | Ø1.33 |
| 3    | 127.8 | Ø1.99 |
| 4    | 71.87 | Ø2.65 |
| 5    | 46.00 | Ø3.32 |

## COMPLIANCE



## CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



**Italy** Eterna è una luce sospesa con un'illuminazione incassata e un design a sospensione, che offre una soluzione di illuminazione sofisticata e contemporanea. Ideale per creare un'atmosfera elegante e senza soluzione di continuità, Eterna unisce prestazioni elevate con un'estetica minimalista.

**Alloggiamento:** Alluminio pressofuso

**Riflettore:** Alluminio anodizzato

**LED:** Caratterizzato da un basso consumo energetico con valutazione L80/B10/F10, con una durata di 50.000 ore. Adatto a temperature operative da -21°C a 56°C.

**UK** Eterna is a suspended light with a deep recessed luminaire and a fixed pendant design, offering a sophisticated and contemporary lighting solution. Ideal for creating a seamless and elegant ambience, Eterna combines high-performance features with a minimalist aesthetic.

**Housing:** Die-cast aluminum

**Reflector:** Anodized aluminum

**LED:** Features low energy consumption with an L80/B10/F10 rating, providing a lifespan of 50,000 hours. Suitable for operating temperatures ranging from -21°C to 56°C.

**!** Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at [www.flussirari.it](http://www.flussirari.it). These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

