
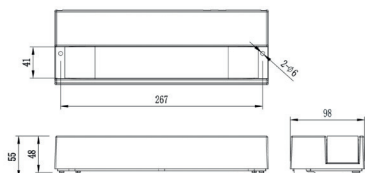


FACCIATA

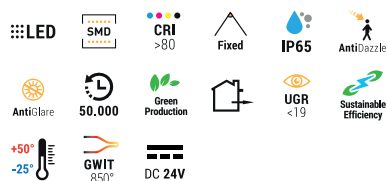

VOLTAGE

ON/OFF: AC100-240V/DC24V
DMX512: DC24V

DRIVER OPTIONS

OF On/Off
DX DMX512

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white
RGBW

OPTIONAL

FINISHING: Black, White, Silver

ACCESSORIES: Honeycomb louver, anti-glare shield

BEAM ANGLE

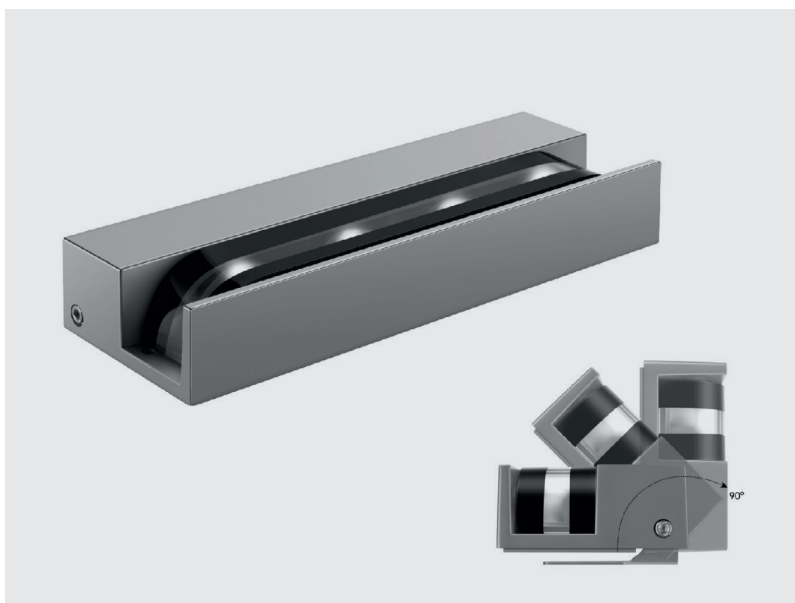

COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
40997036	36W	1080 lm	2x180°	267 x 98 x 55 h

Progettato per l'illuminazione delle facciate e per creare effetti luminosi architettonici sulle finestre, il nostro prodotto offre una soluzione sofisticata e versatile per arricchire gli spazi esterni.

Alloggiamento: Realizzata in alluminio pressofuso, la robusta struttura offre durabilità e resistenza. Ideale per l'illuminazione delle facciate, contribuisce a definire gli spazi esterni con eleganza.

Riflettore: Il riflettore in alluminio anodizzato ottimizza la distribuzione della luce, creando effetti luminosi architettonici unici sulle finestre. La precisione nella progettazione assicura una luminosità uniforme e d'atmosfera.

LED: risparmio energetico L80/B10/F10 - durata 50.000 h - temperatura di lavoro da -25°C a 50°C

Designed for illuminating facades and creating architectural lighting effects on windows, our product offers a sophisticated and versatile solution to enrich outdoor spaces.

Housing: Crafted from die-cast aluminum, the robust structure provides durability and strength. Ideal for facade lighting, it contributes to defining outdoor spaces with elegance.

Reflector: The anodized aluminum reflector optimizes light distribution, creating unique architectural lighting effects on windows. Precision in design ensures uniform and atmospheric brightness.

LED: reduces energy consumption L80/B10/F10 - 50.000 hrs lifetime - working temp -25°C to 50°C

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

