



FLAIA

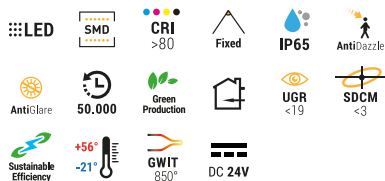

DRIVER OPTIONS	CCT OPTIONS
OF On/Off	2700K Warm white
	3000K Warm white
	4000K Neutral white
	5000K Cool white
	6000K Cool white
	6500K Cool white
OPTIONAL	

FINISHING: Black, Brass, Bronze, Copper

COD.	POWER	LUMEN	DIM./SIZE (mm)
40138002	2W	148 lm	Ø25 x 800 h
40139002	2W	148 lm	Ø25 x 1040 h

Flaia è una soluzione di illuminazione da esterno sofisticata, con una base e un picchetto in ottone, rifiniti con PMMA per garantire durabilità e un'estetica elegante. L'alloggiamento, realizzato con alluminio pressofuso di alta qualità, assicura resistenza e prestazioni a lungo termine. Il riflettore in alluminio anodizzato ottimizza la distribuzione della luce, offrendo un'illuminazione efficiente e mirata.

Alloggiamento: Alluminio pressofuso.

Riflettore: Alluminio anodizzato per una distribuzione ottimale della luce.

LED: Sistema LED ad alta efficienza con valutazione L80/B10/F10, garantendo una durata di 50.000 ore e prestazioni affidabili in temperature da -21°C a 56°C.

Flaia is a sophisticated outdoor lighting solution featuring a brass base and spike, topped with durable PMMA for both strength and visual appeal. Its housing, crafted from high-quality die-cast aluminum, ensures exceptional durability and long-term performance. The anodized aluminum reflector maximizes light distribution, providing efficient and targeted illumination.

Housing: Die-cast aluminum.

Reflector: Anodized aluminum for optimized light focus.

LED: Energy-efficient LED system with an L80/B10/F10 rating, providing a 50,000-hour lifespan and reliable operation in temperatures from -21°C to 56°C.

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

