



FLAMINIO

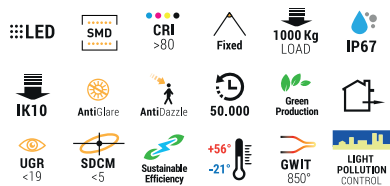

VOLTAGE

ON/OFF: AC100-240V/DC24V
DMX512: DC24V

DRIVER OPTIONS

OF On/Off
IV 1/10V dimming
DX DMX512


CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white


OPTIONAL

FINISHING: Silver

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LED Q.ty	LUMEN	L.COLOUR	B.ANGLE	HOLE (mm)	SIZE (mm)
41178004	4W	3pcs	300 lm	RGB	8°/12,5°/20°/30°/45°	Ø70	Ø80 x 95 h
41178003*	3W	1pc	225 lm	single	120°	Ø70	Ø80 x 95 h
41179004	4W	3pcs	180 lm	RGB	8°/12,5°/20°/30°/45°	Ø70	Ø80 x 95 h
41179003	3W	3pcs	135 lm	single	15°/20°/30°/15x60°	Ø70	Ø80 x 95 h

*Only DC24V

Flaminio è una luce compatta ma robusta, progettata per offrire una resistenza e una affidabilità straordinarie. Garantisce una lunga durata e un'alta resistenza a carichi pesanti e condizioni climatiche estreme. L'efficienza energetica del LED assicura un basso consumo e prestazioni di illuminazione elevate.

Alloggiamento: Struttura in alluminio con copertura in acciaio inox, disponibile nelle finiture 309 e 316.

Diffusore: Diffusore in policarbonato opale.

LED: Tecnologia LED a risparmio energetico con prestazioni L80/B10/F10, durata di 50.000 ore e funzionamento efficace in un intervallo di temperatura da -21°C a 56°C

Flaminio is a compact yet sturdy light, designed for exceptional strength and reliability. It offers a long service life and high resistance to heavy loads and extreme weather conditions. The energy efficiency of the LED ensures low consumption while providing impressive lighting performance.

Housing: Aluminium construction with a stainless steel cover, available in 309 and 316 trim options

Diffuser: Opal polycarbonate diffuser

LED: Energy-saving LED technology with L80/B10/F10 performance, providing a 50,000-hour lifespan and operating efficiently in temperatures ranging from -21°C to 56°C

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

