



FLECTA SLIM




DRIVER OPTIONS	CCT OPTIONS	COD.	POWER	LUMEN	CCT	UNIT CUT	MAX RUN	SIZE (mm)
OF On/Off	2700K Warm white	42737005	5 W/mt	575 lm/mt	Single color	50 mm	5 mt	4 x 2
DL DALI	3000K Warm white							
IV 1/10V dimming	4000K Neutral white							
	6500K Cool white							
	2700K + 5000K RGB / RGBW							

BEAM ANGLE

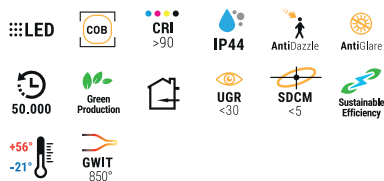

LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



IT Dimensioni sottili in soli 4 mm di larghezza, Flecta Slim è la soluzione perfetta per illuminare in spazi molto stretti. Luce totalmente priva di punti, senza profili o cover diffusori. Mantiene i Lumen elevati e un aspetto elegante grazie al suo design unico. Il singolo BIN garantisce una perfetta uniformità del colore. Ampia gamma CCT e alto CRI. Una soluzione luminosa omogenea e sottile.

LED: risparmio energetico L80/B10/F10 - durata 50.000 h - temperatura di lavoro da -21°C a 56°

UK Slim size in 4mm width, perfect solution for narrow lighting. Totally dot-free light without profiles or PC covers. High lumen and fancy looking by the unique design. One BIN Only ensures perfect color consistency. Wide CCT range and high CRI. Slim homogeneous light solution.

LED: reduce energy consumption with L80/B10/F10 - 50.000 hrs lifetime working under temp (-21°C to 56°C)

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

