


FORTE QUADRO

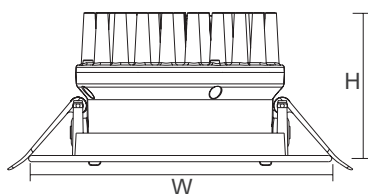

DRIVER OPTIONS

OF On/Off

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL

FINISHING: White trim


REFLECTOR: Shining Silver

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
30142015	15W	1800 lm	40°	Ø120	140 x 140 x 85 h
30142024	24W	2880 lm	40°	Ø155	175 x 175 x 100 h
30142030	30W	3600 lm	40°	Ø155	175 x 175 x 100 h
30142040	40W	4800 lm	40°	Ø175	195 x 195 x 110 h
30142050	50W	6000 lm	40°	Ø210	230 x 230 x 130 h

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Fort Forte Quadro, parte della famiglia Forte, offre la possibilità innovativa di cambiare il modulo LED, permettendo facili regolazioni sia della potenza che della temperatura del colore. Questa versatilità lo rende la soluzione ideale per molteplici applicazioni, unendo funzionalità e adattabilità. La sua elegante forma quadrata aggiunge un tocco sofisticato a qualsiasi ambiente. La tecnologia LED ad alta efficienza garantisce prestazioni eccezionali e un consumo energetico minimo.

Alloggiamento: Alluminio iniettato con rivestimento in PVC e finitura bianco avorio

Riflettore: Alluminio anodizzato

Diffusore: Lente in policarbonato

LED: Riduce il consumo energetico con L80/B10/F10, garantendo una durata di 50.000 ore e funzionando in modo efficace tra -21°C e 56°C.

Fort Forte Quadro, a part of the Forte family, introduces the innovative capability to change the LED module, offering easy adjustments in both power and color temperature. This flexibility makes it an ideal solution for various applications, combining functionality with adaptability. Its elegant square shape adds a sophisticated touch to any environment. The high-efficiency LED technology ensures exceptional performance and minimal energy consumption.

Housing: Injected aluminum with PVC coating and an ivory white finish

Reflector: Anodized aluminum

Diffuser: Polycarbonate lens

LED: Reduces energy consumption with L80/B10/F10, offering a 50,000-hour lifespan, and operates efficiently between -21°C and 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

