
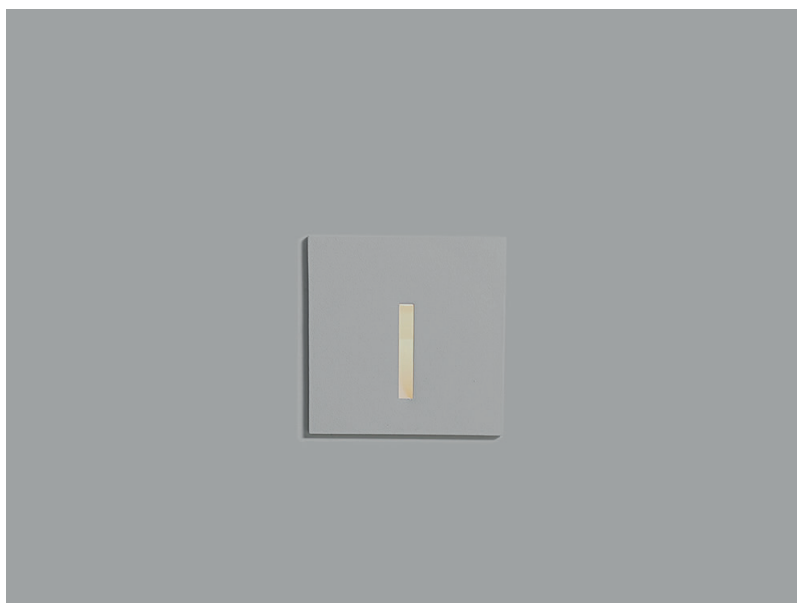



FRESCO

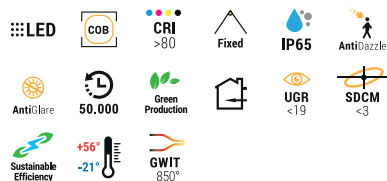

DRIVER OPTIONS	CCT OPTIONS
OF On/Off	2700K Warm white 3000K Warm white 4000K Neutral white 5000K Cool white 6000K Cool white 6500K Cool white
OPTIONAL	
FINISHING: White, Black	

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	DIM./SIZE (mm)
41416003	3W	180 lm	Narrow	65	83 x 3 x 83 h

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	25.74	Ø0.89
2	6.436	Ø1.78
3	2.860	Ø2.67
4	1.609	Ø3.57
5	1.030	Ø4.46

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



FreSCO è una lampada da parete sofisticata che combina una cornice sottile con un design squadrato, creando un'estetica fresca e moderna. La sua forma elegante ma decisa valorizza gli spazi esterni contemporanei, offrendo il perfetto equilibrio tra stile, funzionalità e armonia visiva. Progettato per resistere nel tempo, FreSCO garantisce prestazioni affidabili e un'illuminazione elegante e priva di abbagliamento.

Alloggiamento: Alluminio pressofuso, progettato per resistenza con una finitura resistente agli agenti atmosferici

Riflettore: Alluminio anodizzato, studiato per ridurre l'abbagliamento e ottimizzare la distribuzione della luce

LED: Tecnologia LED ad alte prestazioni con classificazione L80/B10/F10, durata di 50.000 ore e funzionamento costante con temperature da -21°C a 56°C

FreSCO is a sophisticated wall light that blends a narrow bezel with a square design, creating a fresh and modern aesthetic. Its sleek yet bold form enhances contemporary outdoor spaces, offering a perfect balance of style, functionality, and visual harmony. Designed for durability, FreSCO ensures reliable performance while delivering elegant, glare-free illumination.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: High-performance LED with an L80/B10/F10 rating, ensuring a 50,000-hour lifespan and consistent performance in temperatures from -21°C to 56°C

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

