



FUOCO

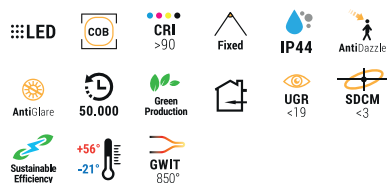


DRIVER OPTIONS	CCT OPTIONS
OF On/Off	2700K Warm white
DL DALI	3000K Warm white
	4000K Neutral white
	5000K Cool white
	6000K Cool white
	6500K Cool white
OPTIONAL	

FINISHING: White, Black

COD.	POWER	LUMEN	B. ANGLE	DIM./SIZE (mm)
41788013	13 W	600 lm	15°/38°	300 x 22.3 x 23.7 h

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	2294	Ø0.42
2	573.0	Ø0.83
3	254.0	Ø1.25
4	143.0	Ø1.67
5	91.00	Ø2.09

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



■ Fuoco è una soluzione magnetica con più faretti dotati di mini riflettori, progettato per fornire un'illuminazione a bassa intensità luminosa. Questo tracklight è ideale per creare un'illuminazione focalizzata con minimo fastidio visivo, rendendolo una scelta perfetta per ambienti residenziali e commerciali.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Basso consumo energetico con una valutazione L80/B10/F10, garantendo una durata di 50.000 ore e progettato per operare a temperature comprese tra -21°C e 56°C.

■ Fuoco tracklight is a magnetic lighting solution featuring multiple spots with mini reflectors, designed to provide low-glare illumination. This tracklight is perfect for creating focused lighting with minimal visual discomfort, making it an excellent choice for both residential and commercial spaces.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Low energy consumption with an L80/B10/F10 rating, ensuring a long 50,000-hour lifespan, and suitable for operation in temperatures ranging from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

