



FUSION 120

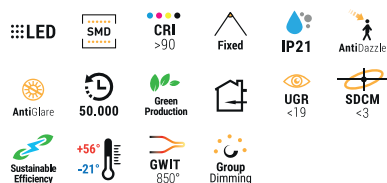

SURFACE / SUPERFICIE

DRIVER OPTIONS

OF On/Off
PH Phase dimming

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL

FINISHING: White, Black, Brass

COD.	POWER	LUMEN	B. ANGLE	DIM./SIZE (mm)
40128015	15W	1187 lm	80°	Ø120 x 60 h

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	453.1	Ø2.65
2	113.3	Ø5.31
3	50.34	Ø7.97
4	29.32	Ø10.6
5	18.12	Ø13.3

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



IT Fusion 120 è una plafoniera rotonda versatile, perfetta per creare un'illuminazione soffusa e diffusa grazie al suo diffusore incassato. Progettato per coniugare funzionalità e stile, l'alloggiamento in alluminio pressofuso garantisce una lunga durata, mentre il riflettore in alluminio anodizzato assicura una distribuzione efficiente della luce. Ideale per ambienti residenziali e commerciali, unisce prestazioni ed eleganza moderna.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Tecnologia LED con classificazione L80/B10/F10, con una durata di 50.000 ore. Funziona in un intervallo di temperatura da -21°C a 56°C, garantendo una lunga durata.

UK The Fusion 120 is a versatile round downlight, perfect for creating soft, diffused lighting with its recessed diffuser. Designed for both functionality and style, its die-cast aluminum housing ensures long-lasting durability, while the anodized aluminum reflector guarantees efficient light distribution. Ideal for both residential and commercial spaces, it combines performance with modern elegance.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: L80/B10/F10 rated LED technology, providing a lifespan of 50,000 hours. Operates within a temperature range of -21°C to 56°C, ensuring long-term reliability.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

