



FUSION 150

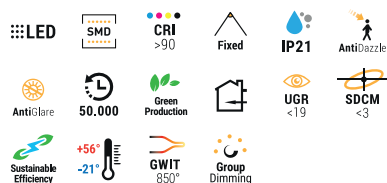

SURFACE / SUPERFICIE

DRIVER OPTIONS

OF On/Off
PH Phase dimming

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL

FINISHING: White, Black, Brass

COD.	POWER	LUMEN	B. ANGLE	DIM./SIZE (mm)
40129015	15W	1911 lm	80°	Ø150 x 60 h

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	705.6	Ø2.74
2	176.4	Ø5.47
3	78.40	Ø8.21
4	44.10	Ø10.9
5	28.23	Ø13.7

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Italy: Fusion 150 offre una sofisticata superficie rotonda con diffusore incassato per una luce soffusa e uniforme. L'alloggiamento robusto in alluminio pressofuso garantisce affidabilità, mentre il riflettore in alluminio anodizzato massimizza l'efficienza della luce e riduce i consumi energetici. Perfetto per creare un'atmosfera serena negli interni moderni, questa plafoniera è progettata per prestazioni a lungo termine.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Tecnologia LED a basso consumo con una classificazione L80/B10/F10, con una durata di 50.000 ore. Funziona in un intervallo di temperatura da -21°C a 56°C, garantendo prestazioni durature.

UK: Fusion 150 offers a sophisticated round diffused surface downlight with a recessed diffuser for a soft, uniform glow. The robust die-cast aluminum housing ensures reliability, while the anodized aluminum reflector maximizes light efficiency and minimizes energy consumption. Perfect for creating a serene ambiance in modern interiors, this downlight is designed for long-term performance.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Featuring energy-efficient LEDs with an L80/B10/F10 rating, this fixture offers 50,000 hours of operation, with a wide temperature range of -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

