



FUSION 90

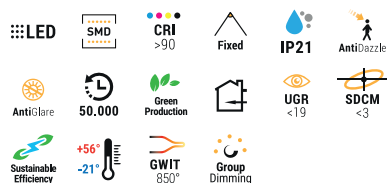

SURFACE / SUPERFICIE

DRIVER OPTIONS

OF On/Off
PH Phase dimming

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL

FINISHING: White, Black, Brass

COD.	POWER	LUMEN	B. ANGLE	DIM./SIZE (mm)
40127010	10W	607 lm	80°	Ø90 x 60 h

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	240.1	Ø2.56
2	60.02	Ø5.13
3	26.68	Ø7.69
4	15.01	Ø10.2
5	9.604	Ø12.8

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Italy: Fusion 90 è una plafoniera rotonda compatta e potente, con diffusore incassato, progettata per offrire un'illuminazione soffusa e ambientale. Il robusto alloggiamento in alluminio pressofuso è abbinato a un riflettore in alluminio anodizzato per una distribuzione superiore della luce. Questa plafoniera è perfetta per aree che richiedono funzionalità ed eleganza, offrendo prestazioni energetiche elevate in un design elegante e moderno.

Alloggiamento: Alluminio pressofuso, progettato per durare con un'estetica contemporanea.

Riflettore: Alluminio anodizzato, progettato per una riflessione efficiente della luce e una distribuzione uniforme.

LED: LED a basso consumo con una classificazione L80/B10/F10, con una durata di 50.000 ore. Funziona in un intervallo di temperatura da -21°C a 56°C, assicurando prestazioni affidabili e durature.

UK: Fusion 90 is a compact yet powerful round surface light with a recessed diffuser, designed to provide soft, ambient lighting. Its durable die-cast aluminum housing is paired with an anodized aluminum reflector for superior light distribution. This downlight is perfect for areas requiring both functionality and style, offering energy-efficient performance in a sleek and modern package.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Energy-efficient LEDs with an L80/B10/F10 rating, offering a 50,000-hour lifespan. Operating temperatures range from -21°C to 56°C for dependable, long-term performance.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

