



GETA

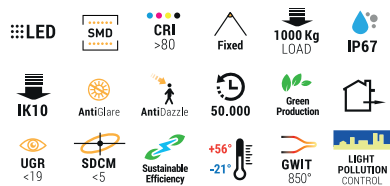

VOLTAGE

ON/OFF: AC100-240V/DC24V
DMX512: DC24V

DRIVER OPTIONS

OF On/Off
IV 1/10V dimming


CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white


OPTIONAL

FINISHING: Silver

BEAM ANGLE




LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES

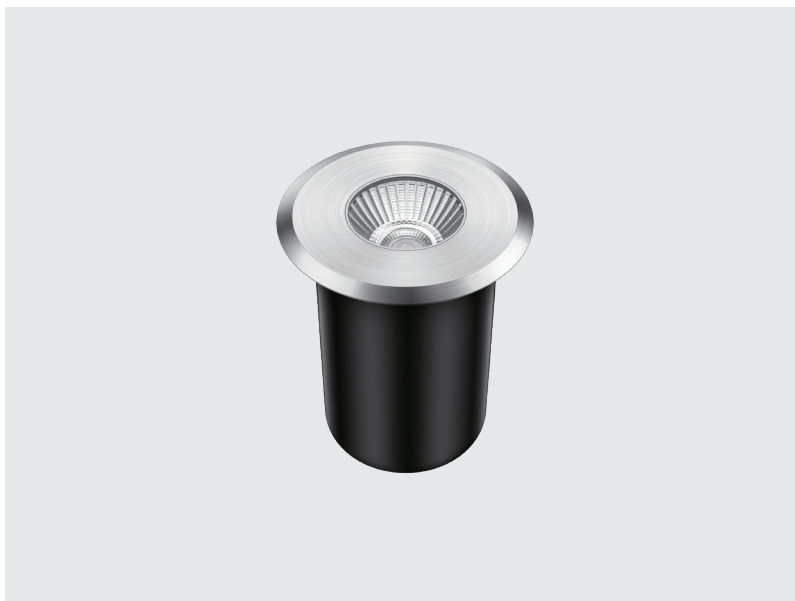

COD.	POWER	LED Q.ty	LUMEN	L.COLOUR	B.ANGLE	HOLE (mm)	SIZE (mm)
41178002	2W	1pc	113 lm	single	8°/12,5°/20°/30°/45°/120°	Ø65	Ø75 x 88 h

IT Geta è una luce compatta ma resistente, progettata per garantire prestazioni affidabili in ambienti esigenti. Il suo design robusto assicura una lunga durata e resistenza agli impatti pesanti e alle condizioni climatiche più severe. Grazie al LED ad alta efficienza, Geta mantiene al minimo il consumo energetico.

Alloggiamento: Realizzato in alluminio, con una finitura in acciaio inox, disponibile nelle versioni 309 e 316.

Diffusore: Vetro temperato trasparente.

LED: Dotato di un sistema LED ad alta efficienza con prestazioni L80/B10/F10, garantendo una durata di 50.000 ore e prestazioni ottimali in un intervallo di temperature da -21°C a 56°C.

UK Geta is a compact yet durable lighting fixture, engineered to provide reliable performance in demanding environments. Its robust design ensures longevity and resistance against heavy impacts and severe weather conditions. With its energy-efficient LED, Geta keeps power consumption to a minimum.

Housing: aluminium, with a stainless steel cover, and available in 309 and 316 finishes.

Diffuser: Transparent tempered glass.

LED: Features a high-efficiency LED system with L80/B10/F10 ratings, offering a 50,000-hour lifespan and optimal performance across temperatures ranging from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

