
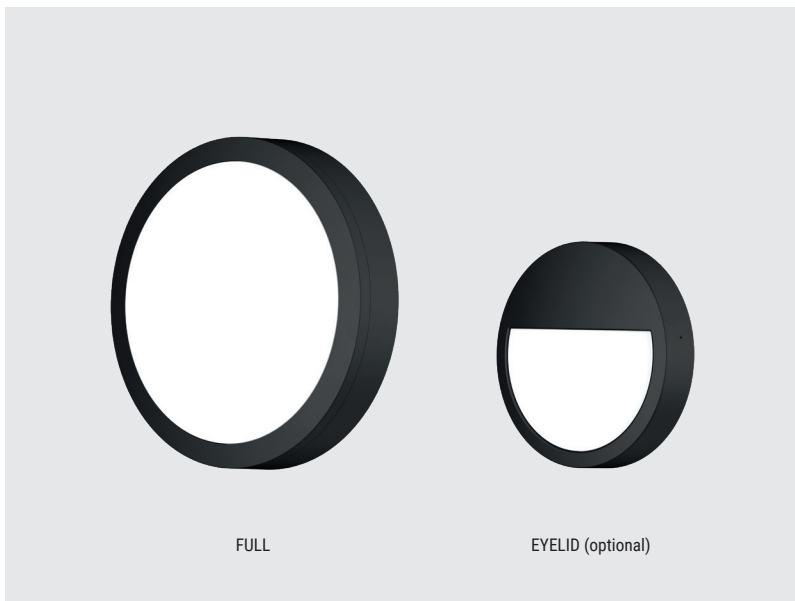



GIARA

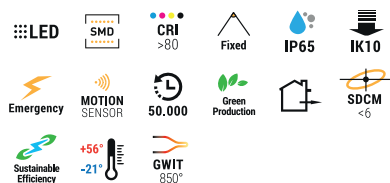

DRIVER OPTIONS

OF On/Off
TR Triac
DL Dali
IV 1/10V dimming

CCT OPTIONS

CCT CCT Changeable
 3000K/ 4000K/
 5700K

OPTIONAL


FINISHING: White RAL9016
 Black RAL9005

FUNCTION: Motion sensor
 3h Integrated emergency module
 Adjustable power

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	TYPE	POWER	LUMEN	B.ANGLE	SIZE (mm)
40235012	FULL	12W	1250 lm	110°	Ø200 x 60 h
40235018	FULL	18W	1850 lm	110°	Ø275 x 60 h
40235025	FULL	25W	2530 lm	110°	Ø275 x 60 h
40235030	FULL	30W	2920 lm	110°	Ø350 x 60 h

Giara è una luce da superficie progettata per valorizzare sia la funzionalità che l'estetica. Disponibile nelle versioni full o con palpebra, offre opzioni di design versatili per adattarsi a diversi ambienti esterni. Il corpo può essere dotato di funzionalità aggiuntive, come un sensore di movimento, potenza regolabile e un modulo di emergenza integrato da 3 ore, aumentando ulteriormente la sua adattabilità e efficienza.

Alloggiamento: Alluminio pressofuso verniciato a polvere

Diffusore: policarbonato

LED: Tecnologia LED avanzata che riduce il consumo energetico (L80/B10/F10), con una durata di 50.000 ore, progettato per funzionare efficacemente in temperature da -21°C a 56°C.

Giara is a wall surface light designed to enhance both functionality and aesthetics. Available in both full and eyelid versions, it offers versatile design options to suit different outdoor environments. The fixture can be equipped with additional features such as a motion sensor, adjustable power, and an integrated 3-hour emergency module, further increasing its adaptability and efficiency.

Housing: Die-cast aluminum powder-coated

Diffuser: Polycarbonate

LED: Advanced LED technology reduces energy consumption (L80/B10/F10), with a 50,000-hour lifespan, designed to operate effectively in temperatures ranging from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

